



Triad Magnetics

460 Harley Knox Blvd

Perris CA 92571

Tel: 951.277.0757 • **Fax:** 951.277.2757



Email: info@triadmagnetics.com • **Website:**

www.triadmagnetics.com

Item # TY-402P, Data/Voice Coupling Transformer

Triad telecommunications transformers are designed to meet the requirements for access over leased private lines or through the dial-up switched telephone network. The TY series transformers are used for a variety of applications including impedance matching, isolation, repeat coil, line balancing, bridging, and hybrid circuits.

Designed to meet FCC Part 68.



[Check Stock](#) | [Specifications](#) | [Applications](#) | [Technical Notes](#)


Check Stock

Click here to check stock >>

CHECK STOCK ✓

Specifications

Min. Longitudinal Balance¹	45 dB 60 dB
Longitudinal Balance Frequency²	1000 to 4000 Hz at 45 dB 200 to 1000 Hz at 60 dB
Dielectric Strength (FCC 68.304)	1500 V

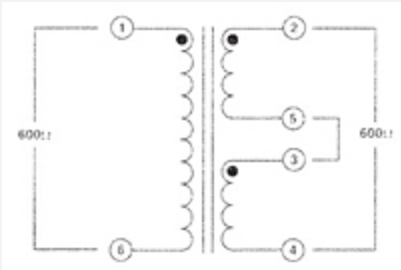Power Level	5 mW
Frequency Range (Data/Voice)	300 to 3500 Hz
Frequency Range (Data)	800 to 3500 Hz
Primary Impedance	600 Ohm
Secondary Impedance	150 Ohm 600 Ohm
Max. DC Current	90 mA
Typical Insertion Loss	1.75 dB
Typical Return Loss	13 dB
Typical Frequency Response	±0.5 dB
Schematic	 <p>Schematic 8</p>
Transformer Contact Type	Split
Industry Standards	FCC 68.304 for Dielectric Strength FCC 68.310 for Longitudinal Balance

Applications

- Bridging Circuits
- Hybrid Circuits
- Impedance Matching
- Isolation
- Line Balancing
- Repeat Coil

1. Primary connections shown on left side of schematics.

¹ FCC 68.310

² FCC 68.310