745078-4 - ACTIVE


AMPLIMITE | AMPLIMITE HD-20

TE Internal #: 745078-4 PCB D-Sub Connectors, Receptacle, Board-to-Board, 25 Position, 2.77 mm [.109 in] Centerline, 2 Row, 3 Connector Shell Size, Round, AMPLIMITE HD-20

View on TE.com >



Connectors > D-Shaped Connectors > D-Sub Connectors > PCB D-Sub Connectors > D-Sub Receptacle Assembly: Vertical, Shell Size 3, 2.77mm

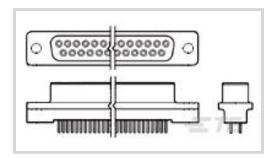

Connector & Housing Type: Receptacle

Connector System: Board-to-Board

Number of Positions: 25

Centerline (Pitch): 2.77 mm [.109 in]

Number of Rows: 2

All D-Sub Receptacle Assembly: Vertical, Shell Size 3, 2.77mm (64)

Features

Product Type Features

Shell Material Configuration

Connector & Housing Type

All Plastic

Receptacle

Connector System	Board-to-Board	
Connector Shell Size	3	
Connector & Contact Terminates To	Printed Circuit Board	
Configuration Features		
Number of Positions	25	
Number of Rows	2	
PCB Mount Orientation	Vertical	
Body Features		
Mating Feature Material	Brass	
Mating Feature Plating Material	Nickel over Copper Flash	
Primary Product Color	Black	
Connector Profile	Standard	
Contact Features		
	30 µin	
Contact Mating Area Plating Material	Gold	

PCB D-Sub Connectors, Receptacle, Board-to-Board, 25 Position, 2.77 mm [.109 in] Centerline, 2 Row, 3 Connector Shell Size, Round, AMPLIMITE HD-20



Contact Underplating Material	Nickel	
PCB Contact Termination Area Plating Material	Tin-Lead	
Contact Base Material	Phosphor Bronze	
Contact Shape & Form	Round	
Contact Current Rating (Max)	6 A	
Termination Features		
Round Termination Post & Tail Diameter	.66 mm[.026 in]	
Termination Post & Tail Length	3.18 mm[.125 in]	
Termination Method to Printed Circuit Board	Through Hole - Solder	
Mechanical Attachment		
Mechanical Attachment Mounting Hole Diameter	3.05 mm[.12 in]	
	3.05 mm[.12 in] With	
Mounting Hole Diameter		
Mounting Hole Diameter PCB Mount Retention	With	
Mounting Hole Diameter PCB Mount Retention PCB Mount Retention Type	With Mounting Hole	

Housing Material	Polyester	
Centerline (Pitch)	2.77 mm[.109 in]	
Dimensions		
PCB Thickness (Recommended)	1.57 – 2.36 mm[.062 – .093 in]	
Row-to-Row Spacing	2.84 mm[.112 in]	
Usage Conditions		
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]	
Operation/Application		
Circuit Application	Signal	
Industry Standards		
Compatible With Approved Standards Products	UL E28476	
UL Flammability Rating	UL 94V-0	
Packaging Features		
Packaging Quantity	10	

Housing Features

PCB D-Sub Connectors, Receptacle, Board-to-Board, 25 Position, 2.77 mm [.109 in] Centerline, 2 Row, 3 Connector Shell Size, Round, AMPLIMITE HD-20

Packaging Method



Product Compliance For compliance documentation, visit the product page on TE.com>		
EU RoHS Directive 2011/65/EU	Not Compliant	
EU ELV Directive 2000/53/EC	Compliant with Exemptions	
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) SVHC > Threshold: Pb (13% in Component Part) Article Safe Usage Statements:	

Tube

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Not Low Halogen - contains Br or Cl > 900 ppm.

Wave solder capable to 265°C

Solder Process Capability

Halogen Content

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Also in the Series | AMPLIMITE HD-20

PCB D-Sub Connectors, Receptacle, Board-to-Board, 25 Position, 2.77 mm [.109 in] Centerline, 2 Row, 3 Connector Shell Size, Round, AMPLIMITE HD-20





Customers Also Bought

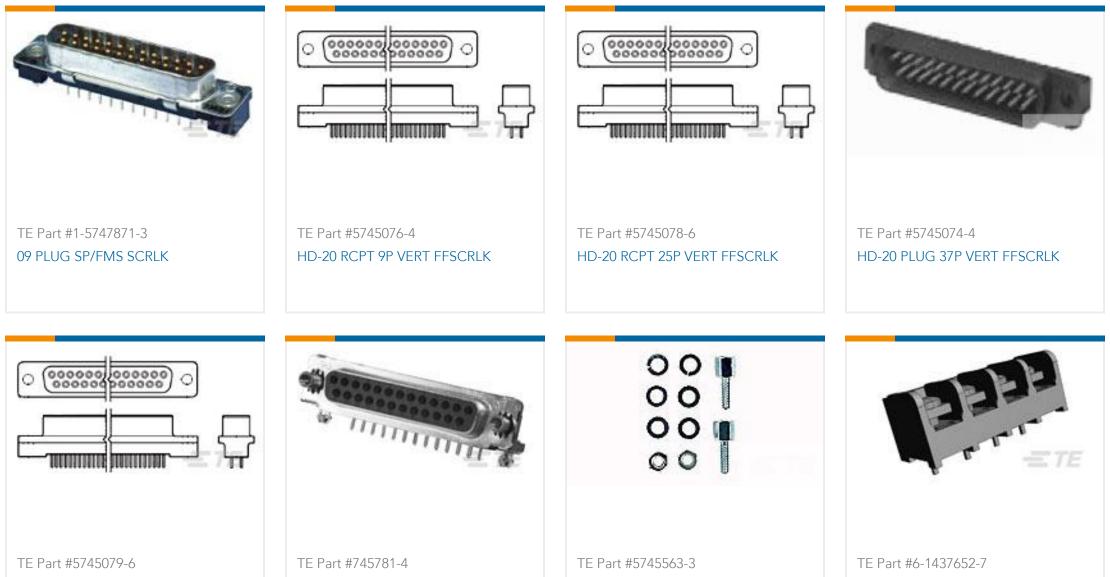

HD-20 RCPT 37P VERT FFSCRLK	09 MSFL RCPT RA 318 (IN,FM)	HD KIT,SCREWLOCK	6PCV-04-006=6PCV ASSEMBLY
TE Part #650945-5 064 EURO TYPE C PIN ST ASSY	TE Part #206509-1 SIZE 20 KEYING PLUG		

Documents

Product Drawings 25 RCPT SP/AP SCRLK

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_745078-4_F.2d_dxf.zip

PCB D-Sub Connectors, Receptacle, Board-to-Board, 25 Position, 2.77 mm [.109 in] Centerline, 2 Row, 3 Connector Shell Size, Round, AMPLIMITE HD-20



English Customer View Model ENG_CVM_745078-4_F.3d_igs.zip English Customer View Model ENG_CVM_745078-4_F.3d_stp.zip English

Product Specifications
Product Specification

English