

AEACBK050048-MW2



Features

- 2 x Dualband 2.4/5GHz WiFi MIMO antenna
- IP67 Rated
- Linear polarization
- VSWR < 2.0
- Gain of 2.0 dBi
- Screw mounting

Applications

- WiFi/ISM applications
- IoT
- M2M
- Remote monitoring
- Smart meters
- Gateways and routers
- Public safety

Electrical Specifications

Parameters	Min.	Typ.	Max.	Units	Note
Frequency Range		2400 ~ 2483.5		MHz	
		4900 ~ 5825		IVIIIZ	
VSWR			2.5		
Polarization		Linear			
Impedance		50		Ω	
Gain		2	·	dBi	

Mechanical Characteristics

Parameters	Description
Connector	2 x SMA Male
Cable Type	2 x LMR100/3M
Mounting	Screw
Radom Material	ABS

Environmental Characteristics

Parameters	Description	
Operating temperature	-40°C to +85°C	
Relative Humidity	Up to 95 %	
Vibration	10 to 55 Hz with 1.5 mm amplitude 2 hours	
Ingress Protection	IP67 (excluding cable outlet)	






AEACBK050048-MW2



Ø50.0 x 48.0 mm RoHS/RoHS II Compliant MSL = 1

Dimensions

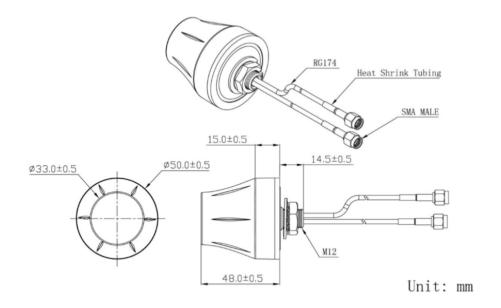

Product Image








AEACBK050048-MW2



Ø50.0 x 48.0 mm RoHS/RoHS II Compliant MSL = 1

VSWR

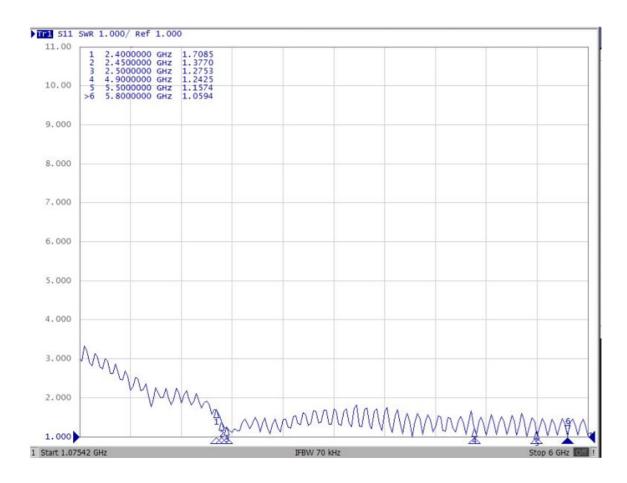






MSL = 1

AEACBK050048-MW2




Radiation Pattern:


2D - Pattern

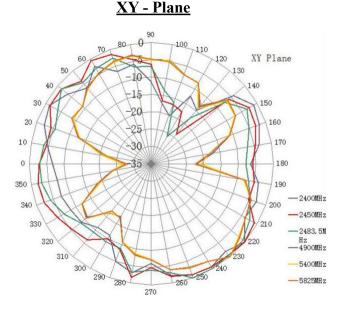

XZ - Plane

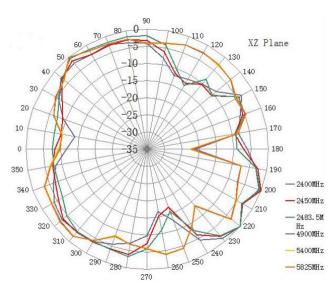

YZ - Plane

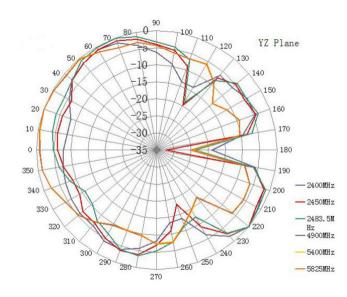

ATTENTION: Abracon LLC's products are COTS - Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.






AEACBK050048-MW2




3D - Pattern


Frequency: <u>2400 MHz</u>




Frequency: <u>2450 MHz</u>




Frequency: 2500 MHz

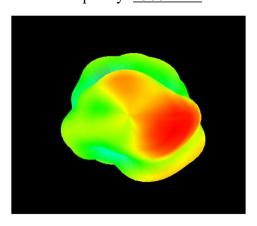


Frequency: 4900 MHz



Frequency: <u>5500 MHz</u>



Frequency: 5800 MHz



Frequency (MHz)	Efficiency	Gain (dBi)
2400	0.58	2.15
2450	0.56	1.95
2500	0.55	1.03
4900	0.51	0.56
5500	0.53	0.58
5800	0.52	0.67

Packaging

The package consists of 100 pcs of antennas and is of dimension 70.0 x 32.0 x 15.0 cm.

