



Triad Magnetics

460 Harley Knox Blvd

Perris CA 92571


Tel: 951.277.0757 • **Fax:** 951.277.2757

Email: info@triadmagnetics.com • **Website:**

www.triadmagnetics.com

Item # FIT50-4, Switch Mode/High Frequency Differential Mode Toroidal Inductors

Triad toroidal inductors are specifically designed to minimize transients. These devices store energy, and therefore, condition the output signal by leveling out the current waveform providing a more stable current supply. Generally used in high frequency circuits, our standardized design provides an economical solution in differential mode applications or as an output inductor.

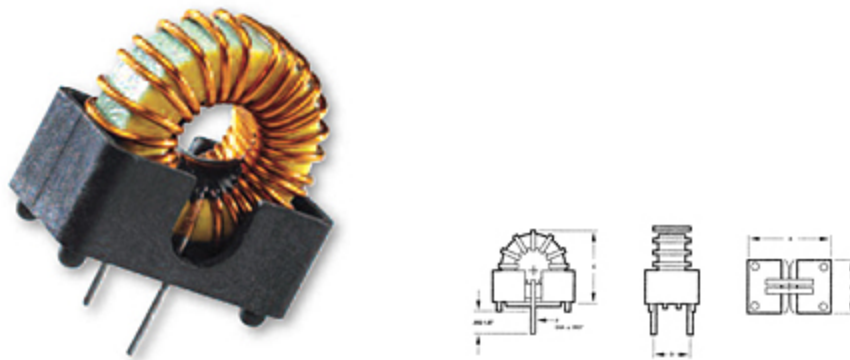

[Check Stock](#) | [Specifications](#) | [Technical Notes](#) | [Note](#)

Check Stock

[Click here to check stock >>](#)

CHECK STOCK ✓

Specifications

Min. Inductance (No Bias)	21.65 μ H
Min. Inductance at Bias	12.27 μ H
DC Current Rating	4.8 A

Max. DCR	29.2 Ohm 29.2 mOhm
Dimension (A)	0.700 in
Dimension (B)	0.475 in
Dimension (C)	0.750 in
Dimension (D)	0.300 in
Dimension (E)	0.028 in
Weight	0.012 lb

Technical Notes

1. Nominal inductance values are typically 10 % higher than minimal rating.
2. Biased inductance measured at rated DC amps.
3. Operation at rated current yields approximately 40°C temperature rise over 20 °C ambient.

Note

A FIT-KIT is available which includes one of each of the above listed components.