
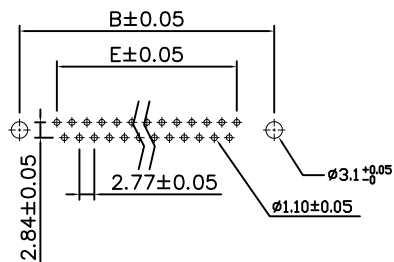


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.



Customer Drawing

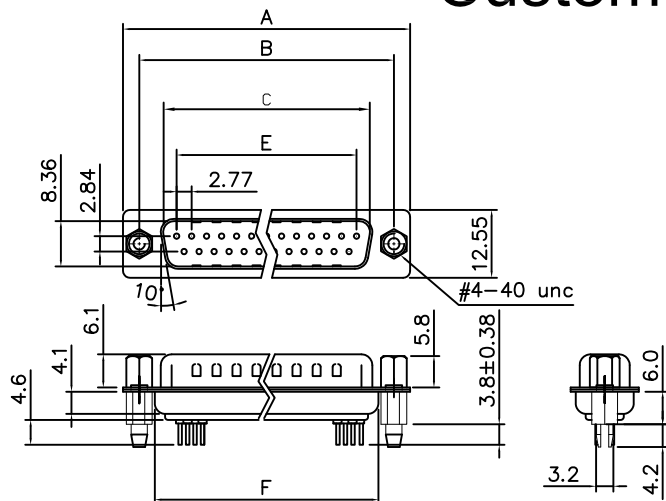

RECOMMENDED P.C.B LAYOUT
TOLERANCE: ±0.05MM

Dimensions

Positions	A	B	C	E	F
9	30.81	24.99	16.92	11.08	19.20
15	39.20	33.30	25.25	19.39	27.70
25	53.04	47.04	38.96	33.24	41.10
37	69.40	63.50	55.42	49.86	57.30

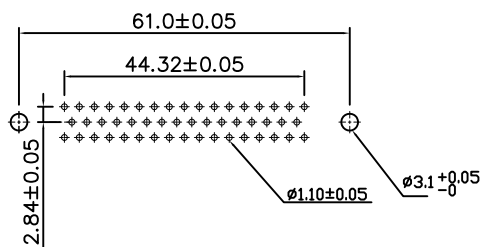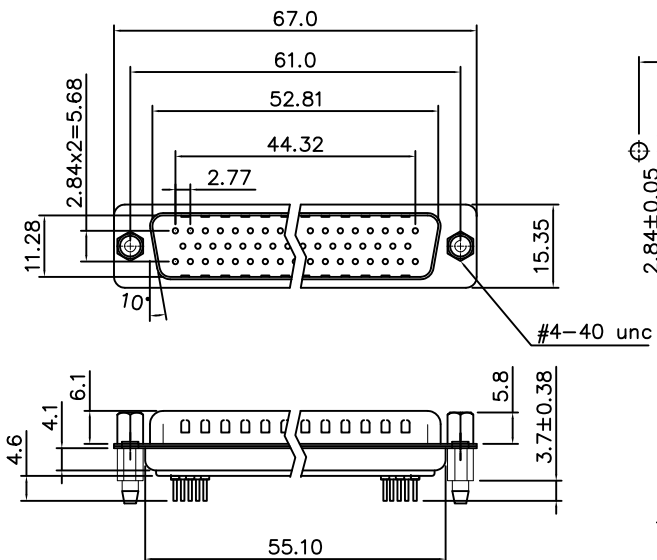

RECOMMENDED P.C.B LAYOUT
TOLERANCE: ±0.05MM

50 POSITIONS

PRODUCT CODE

L 717 SD X H XX P OL2 RM8 C309

L: RoHS Compliant

77: tinned shell +
dimples for plug

SD: standard density

Shell Size :E,A,B,C,D

Mounting type:
H=Rear insert 4-40

C309: 30u" gold

RM8 =
Retention clip
+ front screwlock

Termination:
Straight for PCB

Contact type:
P: Pin

Configuration:
9,15,25,37,50

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE
U.S.	METRIC	DRAWN	DATE	
.X +/-	0.50	Patric Liu	08/18/16	
.XX +/-	0.30	CHECKED Tony Tang	08/18/16	
.XXX +/-	0.20	CHECKED		
FRACTIONS +/-	5'			
ANGLES +/-				
FOR MATERIALS AND FINISHES SEE NOTES		DRAWING FILE :		
REMOVE SHARP EDGES		ANGLE OF PROJECTION		
DIMENSIONS				
U.S.	INCHES			
METRIC	MM			

TITLE
D-SUB connector, SD Series

SIZE	DRAWING NO.	REV.
A4	L717SDXHXXPOL2RM8C309	2
SCALE	NONE	SHEET 1 OF 1