


PX0415/1 Datasheet

Product Name // Rewireable Flex SMB Connector For RG-174 Cable

 [View Product Page](#)

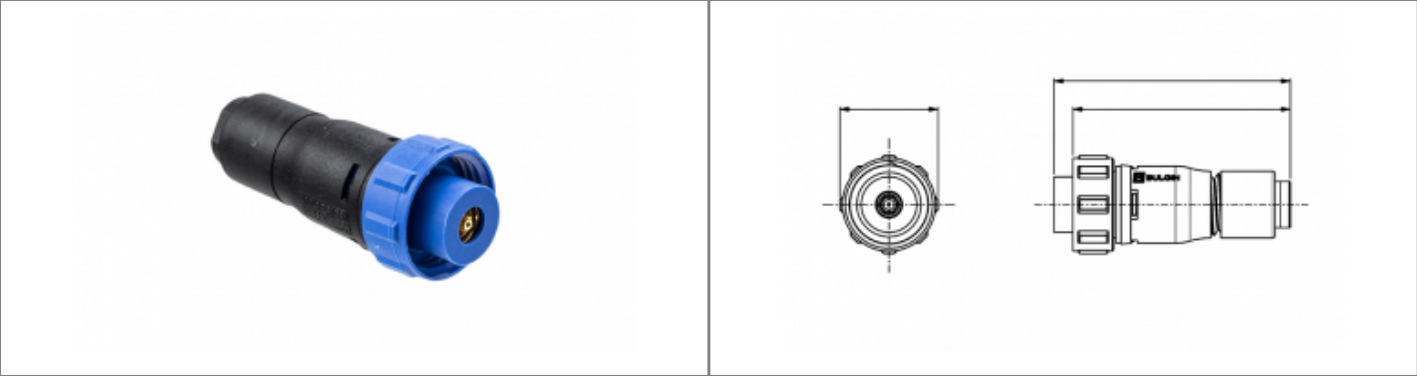

// Product Description:	
 Rewireable SMB Connector	 14319 hand crimp tool available separately
 Water and dustproof to IP68 when mated with compatible connector	 Pre-wired connector also available (PX0416)
 Frequency range 0-4GHz	 PX0481 Sealing Cap available separately to maintain IP rating of unmated connectors
 Supplied with 50 Ohm impedance SMB plug	 Mate with Panel connector PX0414
 For RG-174 cable	

// General Information:	
Product Display Title:	Rewireable SMB Connector
Product Family:	Circular Data Connectors
Product Series:	400 Series - SMB Buccaneer
Approvals:	CSA, UL, VDE
Body Material:	Polyamide (PA)
Body Material Type:	Plastic Body
Contact Type:	Plug Contact
Coupling Type:	Screw
Diameter Over Coupling Ring Mm:	19.1mm
Flamability Rating:	UL94V-0
Function:	Flex Cable Connector
Ip Rating:	IP68, IP69K
Max Cable Entry Size:	3mm
Min Cable Entry Size:	2.5mm
Max Operating Temperature:	+80°C
Min Operating Temperature:	-40°C
Number Of Contacts:	1 Contact

// Product PDF Links

 400 Series SMB connectors product...

 PX0415/1 400 Series SMB connector...