


# PX0675/63/WH Datasheet

**Product Name // IEC Connector Flange Mount Outlet**  
**PX0675 Series White 6.3mm Tab Termination EN60 320-2-2**  
**Standard Sheet F Class I**

 [View Product Page](#)

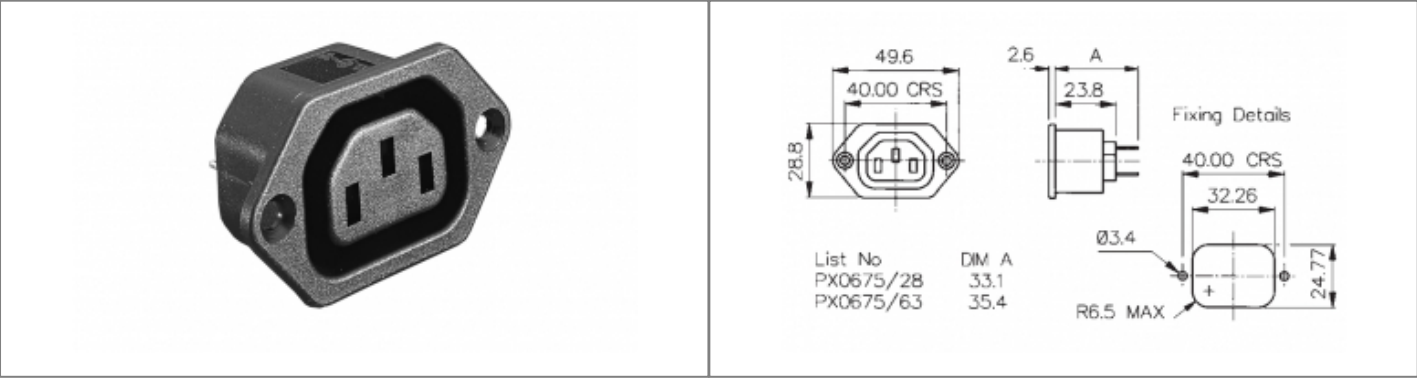

## // Product Description:

- Flange Mount IEC Outlets
- EN60 320-2-2 Standard Sheet F Class I
- Choice of Termination depending on part code: /28 - 2.8mm Solder Tag, /48 - 4.8mm Tab, /63 - 6.3mm Tab, /PC - PCB Spills
- Choice of colour depending on part code: /WH - White, /GY - Grey, no suffix - Black (some approvals apply to specific colour and/or Termination choices only - see data for details)
- PCB Mount version (part codes containing /PC) available with rear cover (part codes suffixed /12599), for all other versions Insulation Boot for rear of connector available separately (part code 12075)
- Retaining Clip KT0006 available separately to prevent accidental removal of mating connector (for use with PX0686 Female Connector only)
- Blanking Cover for front of connector available separately (part code 14228)
- Mate with PX0685, PX0686, PX0686/SE

## // General Information:

|                            |                                       |
|----------------------------|---------------------------------------|
| Product Display Title:     | Flange Mount IEC Outlets              |
| Product Family:            | IEC Connectors                        |
| Product Series:            | IEC60320 Main Inlets and Outlets      |
| Approvals:                 | CSA, UL                               |
| Body Material:             | Nylon 66                              |
| Current Max:               | 15A                                   |
| Flamability Rating:        | UL94V-0                               |
| Function:                  | Flange Mount Connector                |
| Iec Connector Colour:      | White                                 |
| Iec Connector Mates With:  | PX0685,PX0686,PX0686/SE               |
| Iec En60620 Type:          | EN60 320-2-2 Standard Sheet F Class I |
| Max Operating Temperature: | +70°C                                 |
| Min Operating Temperature: | -40°C                                 |
| Number Of Contacts:        | 3 Contacts                            |
| Voltage Max:               | 250V                                  |

### // Product PDF Links

 [IEC Connectors product data](#)

### // Product 3D CAD Model Links

 [PX0675/63/WH3D CAD Model](#)

### // Product Certificate Links

 [VDE Certificate - IEC P675](#)

 [UL & CSA Certificate E93288](#)

 [CE Certificate - P675](#)