
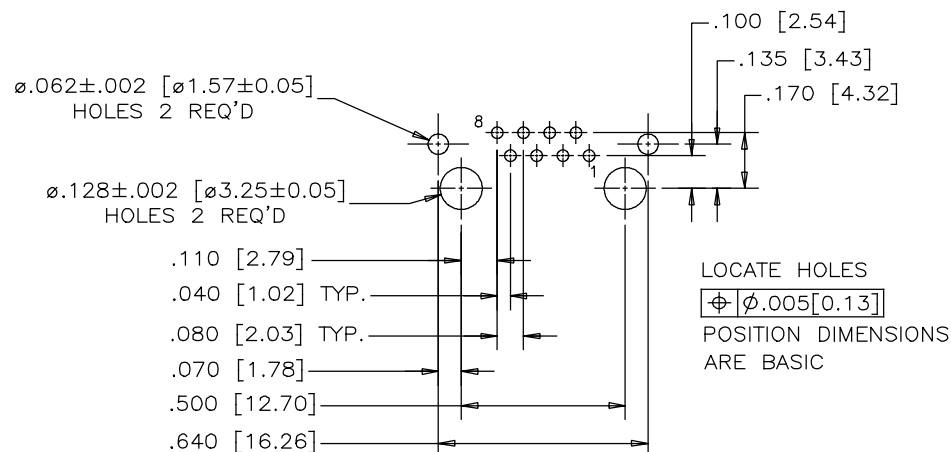
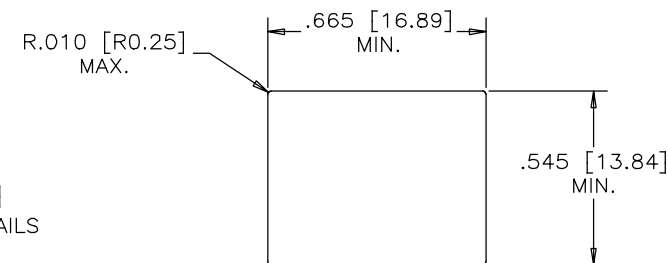
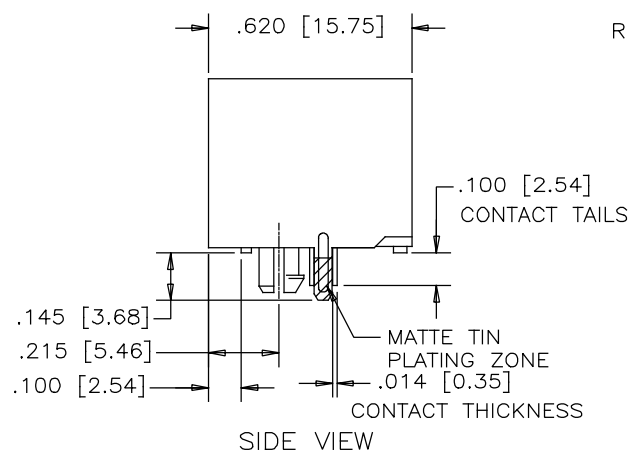


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	AUG19/14	L.CHAN
B	ADD DIMENSIONS OF CONTACT	JAN15/15	L.CHAN
C	CHANGE SHIELD TAIL PLATING	APR06/17	L.CHAN

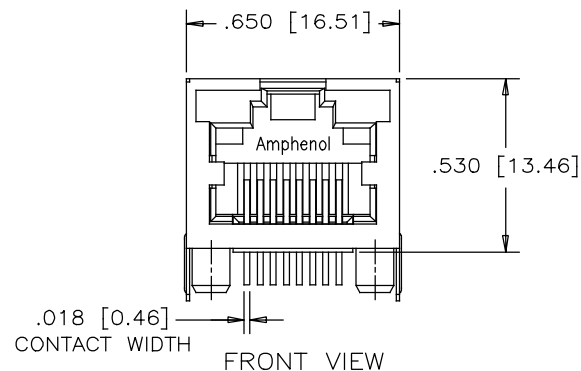

NOTES:

1. MATERIALS:

PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0, COLOUR: BLACK

CONTACTS:

PHOSPHOR BRONZE
PLATING: 50 μ " [1.27 MICRONS]
MIN. GOLD ON MATING SURFACES.
50 μ " [1.27 MICRONS]
MIN. NICKEL UNDERPLATE
100 μ " [2.54 MICRONS]
MIN. MATTE TIN ON CONTACT TAILS.

SHIELD: STAINLESS STEEL WITH MATTE TIN PLATING ON SOLDER TAIL

2. RECOMMENDED SOLDERING TEMPERATURE:

WAVE SOLDERING AT 260°C MAXIMUM FOR 5 SEC MAXIMUM.

3. PART NUMBER: RJHSE-5F80

UNLESS SPECIFIED OTHERWISE		DRAWN	AMY.Z	DATE	JUL18/13	Amphenol Canada Corp. www.amphenolcanada.com	
PRIMARY UNITS	INCH	CHECKED	L.CHAN		JUL18/13		
SECONDARY	MILLIMETER	M.E. APP'D				TITLE HIGH SPEED RJ45 SINGLE-PORT WITH SHIELD (WITHOUT TABS), 50U" GOLD PLATING WITHOUT LED'S - RoHS COMPLIANT	
REFERENCE IN PARENTHESES		Q.A. APP'D					
GENERAL TOLERANCES		DWG APPR.				DWG. NO. P-RJHSE-5F80	
1 DECIMAL PLACE		ENG. REL. NO.					
2 DECIMAL PLACES		REF.				REV C	
3 DECIMAL PLACES		THIRD ANGLE PROJECTION					
ANGULAR DEGREES						CODE ID NO. 03554 DWG SIZE: C SCALE: N/A SHEET 1 OF 1	