



**Triad Magnetics**

460 Harley Knox Blvd

Perris CA 92571


**Tel:** 951.277.0757 • **Fax:** 951.277.2757

**Email:** [info@triadmagnetics.com](mailto:info@triadmagnetics.com) • **Website:**

[www.triadmagnetics.com](http://www.triadmagnetics.com)

## Item # SP-20, Mil-T-27E Red Spec Printed Circuit Audio Transformers

Triad high reliability audio transformers provide the durability and precision required in today's demanding designs. These transformers are available for a wide variety of applications. The line of Red Spec audio transformers is designed and constructed to meet the rigid requirements of MIL-T-27E. These transformers feature an epoxy molded case, gold plated leads and exceptional operation from 300 Hz to 100 kHz.

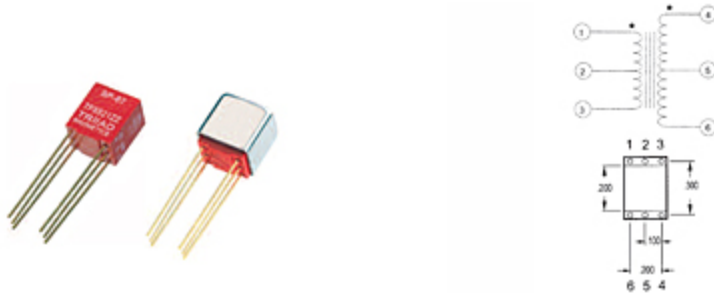

[Check Stock](#) | [Specifications](#) | [Technical Notes](#)

Check Stock

Click here to check stock >>

CHECK STOCK ✓

Specifications

<b>Frequency Response Range</b>	300 Hz to 100 kHz
<b>Mil Type Number</b>	TF5S21ZZ
<b>Power Level</b>	50 mW
<b>Matching Impedance (Primary)</b>	10000 Ohm Center Tap

<b>Matching Impedance (Secondary)</b>	1200 ohm Center Tap
<b>Max. Primary Unbalanced DC Current</b>	1.0 mA
<b>DC Resistance (Primary)</b>	1050.0 Ohm
<b>DC Resistance (Secondary)</b>	200.0 Ohm
<b>Overall Turns Ratio</b>	2.88:1.0
<b>Industry Standards</b>	Mil-T-27E
<b>Transformer Contact Type</b>	Center Tap
<b>Primary Impedance</b>	10000 Ohm
<b>Secondary Impedance</b>	1200 Ohm
<b>Features</b>	Epoxy Molded Case Exceptional Operation from 300 Hz to 100 kHz Gold Plated Leads

## Technical Notes

1. Plug-in terminals are precision spaced to provide fixed mounting centers.
2. Red Spec transformers are hi-pot tested at 1,000 VRMS.
3. 150 VDC working voltage.
4. Red Spec transformers feature small footprint base dimensions of 0.310 by 0.410 inch.
5. Pin diameter = 0.020 inch.