


REV. 2 3/21/95

COIL: @ 25° C	
RESISTANCE	700 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	1.5 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 ± 1 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: _____

CUSTOMER DATA SHEET

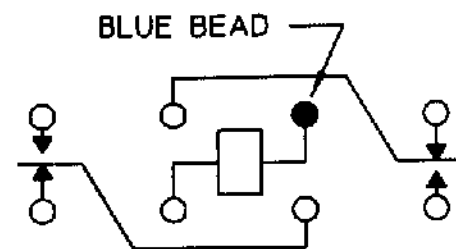

CONTACT RATING: 2 AMPS 30 VDC
 RESISTIVE .75 AMP 30 VDC INDUCTIVE
 100,000 OPERATIONS

DR. R.B. 3/21/95 CK 3/21/95



CUST. HI-G
 CUST. NO. 2K-1B-126

TYPE 'HFW' RELAY

HFW1196S01