




1	2	3	4	5	6
AMPHENOL PART NUMBER	ATTENUATION (NOTE 2)				
A 954-130-5101	1.0 ± 0.5 dB				
954-130-5102	2.0 ± 0.5 dB				
954-130-5103	3.0 ± 0.5 dB				
954-130-5104	4.0 ± 0.5 dB				
954-130-5105	5.0 ± 0.5 dB				
954-130-5106	6.0 ± 0.6 dB				
954-130-5107	7.0 ± 0.7 dB				
B 954-130-5108	8.0 ± 0.8 dB				
954-130-5109	9.0 ± 0.9 dB				
954-130-5110	10.0 ± 1.0 dB				
954-130-5111	11.0 ± 1.1 dB				
954-130-5112	12.0 ± 1.2 dB				
C 954-130-5113	13.0 ± 1.3 dB				
954-130-5114	14.0 ± 1.4 dB				
954-130-5115	15.0 ± 1.5 dB				
954-130-5116	16.0 ± 1.6 dB				
954-130-5117	17.0 ± 1.7 dB				
954-130-5118	18.0 ± 1.8 dB				
954-130-5119	19.0 ± 1.9 dB				
D 954-130-5120	20.0 ± 2.0 dB				

NOTES:

1. ALL DIMENSIONS ARE SHOWN IN INCHES[MILLIMETERS].
2. OPERATING WAVELENGTH: 1260-1360 AND 1430-1580 nm.
ATTENUATION VALUES FOR DEVICES WHEN USED BETWEEN PATCH CORDS. WHEN USED AT A DETECTOR INTERFACE, CONSULT THE FACTORY FOR ATTENUATION VALUES.
3. BACKREFLECTION = <-55dB



LABEL TO SHOW NOMINAL VALUE WHEN ATTENUATORS ARE INSTALLED.

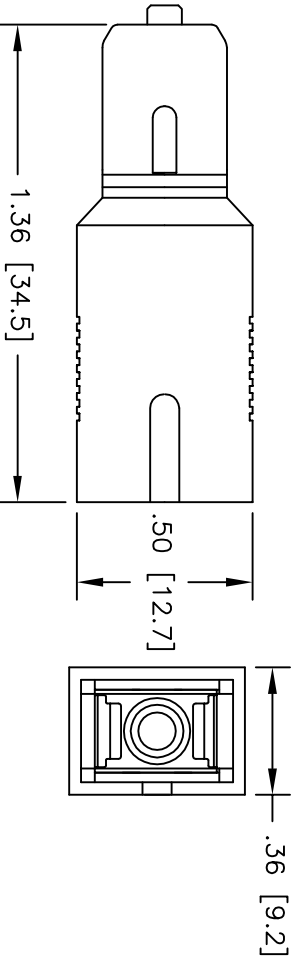

1	2	3	4	5	6
UNLESS OTHERWISE SPECIFIED TOLERANCE TO BE		<p>NOTE: These drawings, specifications, & other data (1) are owned by Amphenol Corporation. All rights reserved. No part of this drawing may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage and retrieval system, without the prior written permission of Amphenol Corporation. (2) All dimensions are in inches unless otherwise specified. (3) All dimensions are nominal unless otherwise noted. (4) All dimensions are shown in inches unless otherwise noted. (5) All dimensions are shown in millimeters unless otherwise noted. (6) All dimensions are shown in millimeters unless otherwise noted. (7) All dimensions are shown in millimeters unless otherwise noted. (8) All dimensions are shown in millimeters unless otherwise noted. (9) All dimensions are shown in millimeters unless otherwise noted. (10) All dimensions are shown in millimeters unless otherwise noted.</p>		<p>NOTE: These drawings, specifications, & other data (1) are owned by Amphenol Corporation. All rights reserved. No part of this drawing may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage and retrieval system, without the prior written permission of Amphenol Corporation. (2) All dimensions are in inches unless otherwise specified. (3) All dimensions are nominal unless otherwise noted. (4) All dimensions are shown in inches unless otherwise noted. (5) All dimensions are shown in millimeters unless otherwise noted. (6) All dimensions are shown in millimeters unless otherwise noted. (7) All dimensions are shown in millimeters unless otherwise noted. (8) All dimensions are shown in millimeters unless otherwise noted. (9) All dimensions are shown in millimeters unless otherwise noted. (10) All dimensions are shown in millimeters unless otherwise noted.</p>	
LINEAR		ANGULAR		MATERIAL	
XX ± .1		X ± .1		DRN: T. BARKER	
XXX ± 0.01		XX ± .30		DATE: 2/2/01	
XXX ± 0.003		XXX ± .15		REV: A	
BREAK ALL SHARP EDGES AND REMOVE ALL BURRS		FINISH:		TITLE: ATTENUATOR, SC/UJPC PLUG STYLE	
DO NOT SCALE		REF.:		APVD: DATE:	
DIMENSIONS IN INCHES		THIRD ANGLE PROJECTION		SCALE: NTS	
PART No: 954-130-51XX		DATE: 2/2/01		DATE:	
DRAWING NO. 954-130-51XX		REV: A		DATE: 2/2/01	
1954 Ohio Street, Uak, IL60532, USA		DESCRIPTION: FIRST ISSUE		T.L.W: 07/09/07	
Amphenol FIBER OPTIC PRODUCTS		ECO No: -----		E07-0219	
SHEET 1 OF 1		DATE: 2/2/01		DATE: 2/2/01	