


REV.	ECO NO.	DESCRIPTION	RELEASED BY	DATE
B	6042	CHANGE CONNECTOR	JSK	5/2/08

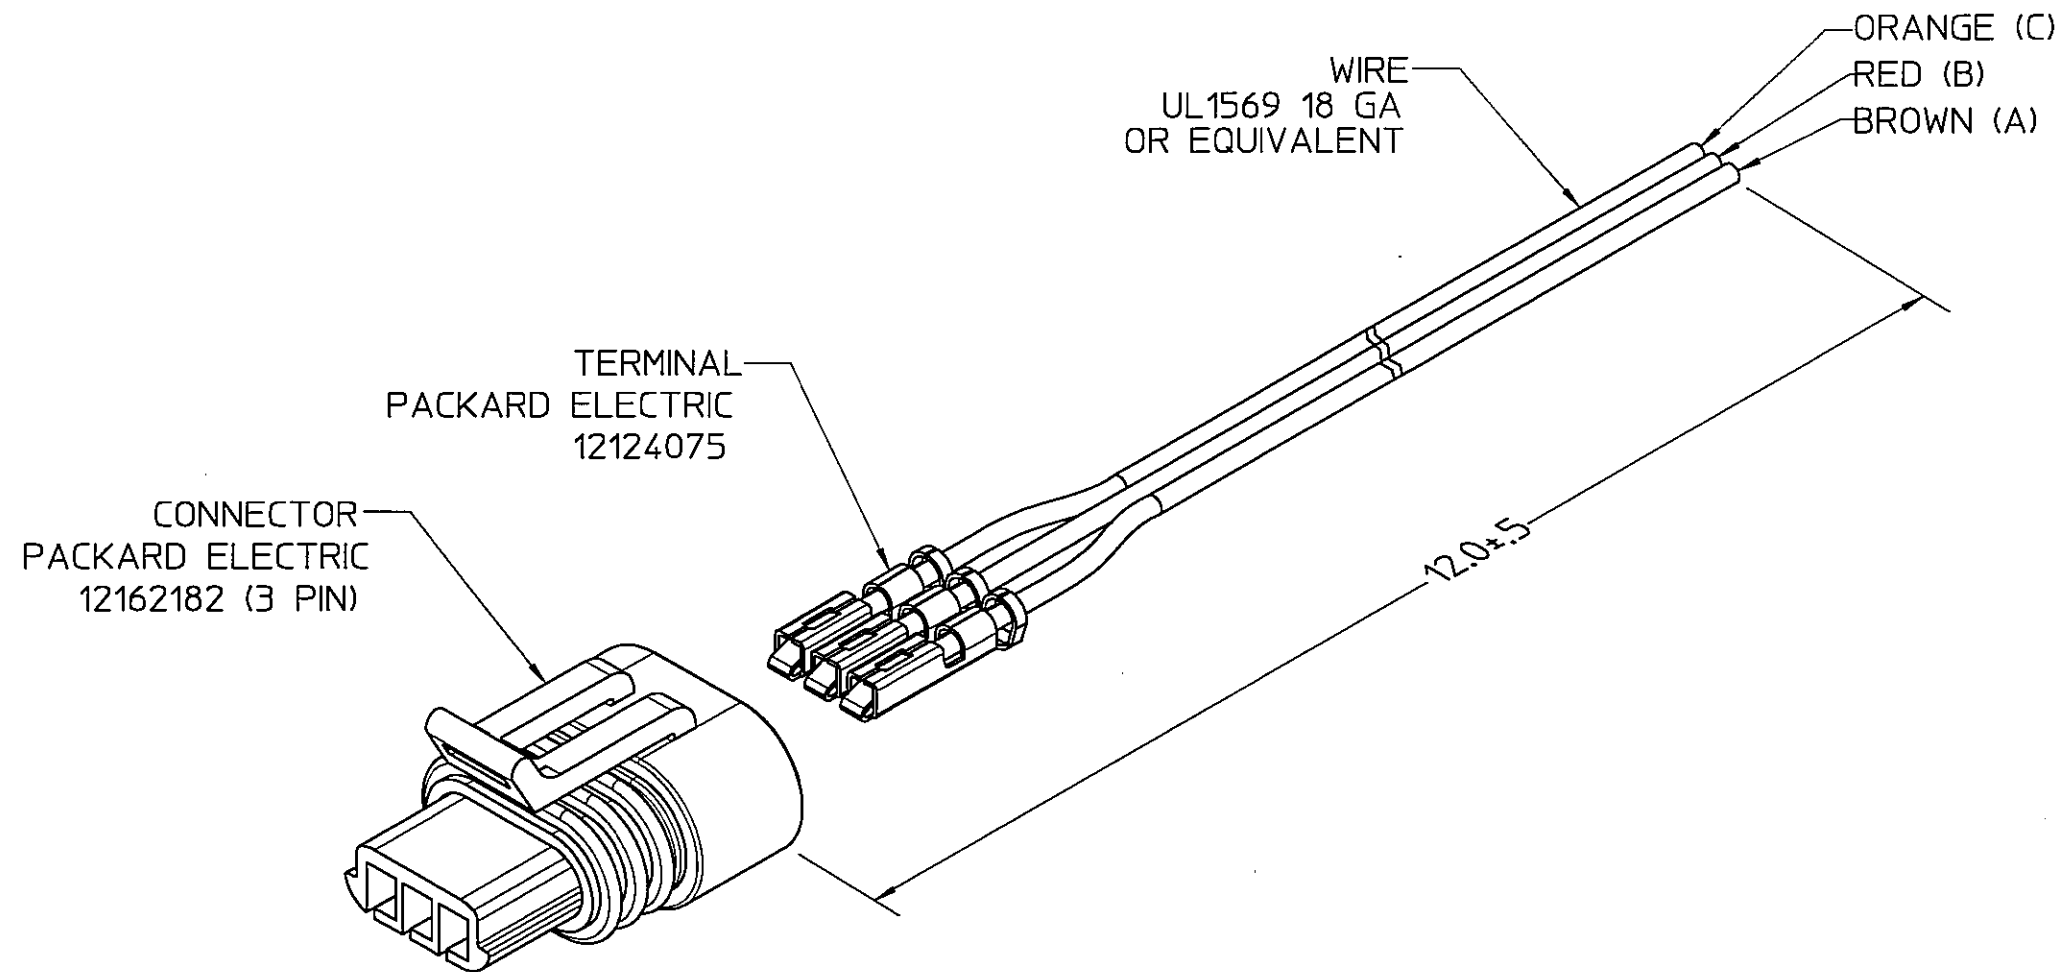

UNCONTROLLED DOCUMENT

PURCHASED ASSY

1. EXPLODED VIEW SHOWN FOR CLARITY.

- C** IDENTIFIES FEATURES THAT ARE DESIGNATED SIGNIFICANT BY CUSTOMER.
- SIG** IDENTIFIES FEATURES THAT SIGNIFICANTLY AFFECT FIT OR FUNCTION AND WHICH REQUIRE ADDITIONAL CONTROL PER THE DUNCAN ELECTRONICS QUALITY SYSTEM DOCUMENTATION.
- SPC** IDENTIFIES FEATURES THAT SHALL BE MONITORED FOR PROCESS CONTROL AND FOR WHICH STATISTICAL DATA SHALL BE SUBMITTED PER THE DUNCAN ELECTRONICS QUALITY SYSTEM DOCUMENTATION.

NOTES: UNLESS OTHERWISE SPECIFIED

This document and all information contained herein are proprietary and are the sole property of BEI Duncan Electronics Division and shall not be reproduced or disclosed without written authorization. Use of this information for the purpose of manufacture does not constitute the release of the proprietary rights thereto.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES PER ASME Y14.5M		THIRD ANGLE PROJECTION		BEI DUNCAN ELECTRONICS DIVISION BEI TECHNOLOGIES, INC. DUNCAN ELECTRONICS DIVISION, 170 TECHNOLOGY DRIVE, IRVINE, CA 92618-2401			
TOLERANCES ARE:		APPROVALS	DATE	TITLE			
DECIMALS	ANGLES	DEPUE	29/APR/08	CABLE ASSY MODEL 9850			
.XX ±.010	°.1°	CHECKED	4/30/08				
.XXX ±.005		DESIGN/ENG.		SIZE	CAGE CODE	DWG NO.	REV.
.XXXX ±.0005		ENG. APPROVAL		B	11534	1-172	B
DIAMETERS SHOWN ON COMMON CENTERS $\pm .005$		SCALE		PAGE 1 OF 1			
FEATURES SHOWN ON COMMON CENTERS $\pm .005$		2X					
INSIDE/OUTSIDE RADIUS .005 MAX.							
DO NOT SCALE DRAWING							