

BANANA PLUGS - JACKS

25-2531-1-02
25-2532-1-02
FINISH


BANANA PLUG



15 AMPS CAPACITY

Standard size spring for standard size banana jacks. Supplied with tinned lug and screw for panel mounting.

25-2531-1 6-32 x .250 SCREW
25-2532-1 8-32 x .250 SCREW



COMPONENT NO.	MATERIAL	(02) FINISH
Plug Body	Brass	Nickel
Spring	Beryllium Copper	Nickel
Lug	Brass	Tinned

25-2259-X-03
FINISH


BANANA PLUG

5 AMPS CONTINUOUS DUTY

Miniature size spring for miniature size banana jacks. Spring, one piece heat treated beryllium copper. Fits miniature (.104) dia. banana jack.



PART NO. L PANEL
25-2259-2 .094 1/16
25-2259-3 .125 3/32
25-2259-4 .156 1/8



COMPONENT NO.	MATERIAL	(03) FINISH
Plug Body	Brass	Gold
Spring	Beryllium Copper	Gold

01-2260-X-02
FINISH


BANANA PLUG

RATED FOR 15 AMPERES CONTINUOUS DUTY



Short size spring for standard size banana jacks. Plug body is heat treated to facilitate swaging.

PART NO. L PANEL
01-2260-2 .105 1/16
01-2560-3 .135 3/32
01-2260-4 .165 1/8



COMPONENT NO.	MATERIAL	(02) FINISH
Plug Body	Brass	Nickel
Spring	Beryllium Copper	Nickel

25-2262-X-02
FINISH


BANANA PLUG

15 AMPS CONTINUOUS DUTY

Short size spring for standard size banana jacks. Spring, one piece heat treated beryllium copper. Fits standard (.156) dia. banana jack.



PART NO. L PANEL
25-2262-2 .094 1/16
25-2262-3 .125 3/32
25-2262-4 .156 1/8



COMPONENT NO.	MATERIAL	(02) FINISH
Plug Body	Brass	Nickel
Spring	Beryllium Copper	Nickel

01-2251-X-01
FINISH


BANANA PLUG

RATED FOR 5 AMPERES CONTINUOUS DUTY



Miniature size spring for miniature size banana jacks. Plug body is heat treated to facilitate swaging.

PART NO. L PANEL
01-2251-2 .105 1/16
01-2551-3 .135 3/32
01-2251-4 .165 1/8



COMPONENT NO.	MATERIAL	(01) FINISH
Plug Body	Brass	Silver
Spring	Beryllium Copper	Silver

01-2258-X-01
FINISH


BANANA PLUG

RATED FOR 5 AMPERES CONTINUOUS DUTY

Miniature size spring for miniature size banana jacks. Plug body is heat treated to facilitate swaging.



PART NO. L PANEL
01-2258-2 .094 1/16
01-2258-3 .125 3/32
01-2258-4 .156 1/8




COMPONENT NO.	MATERIAL	(01) FINISH
Plug Body	Brass	Silver
Spring	Beryllium Copper	Silver

09-9141-1-044XX
FINISH COLOR

BANANA PANEL JACK INSULATED

RATED FOR 10 AMPERE CURRENT




Part is completely insulated from chassis. Accommodates panels from 1/16" to 1/4" thick. Design of part accepts mini-banana plug. One piece turret contact allows sealed panel entry hole.

09-9140-1-044XX
FINISH COLOR

BANANA PANEL JACK INSULATED

RATED FOR 10 AMPERE CURRENT



Part is completely insulated from chassis. Accommodates panels from 1/16" to 1/4" thick. Design of part accepts mini-banana plug. One piece turret contact allows sealed panel entry hole.



FOR ADDITIONAL SIZES AND MATERIALS, CONTACT FACTORY
COLOR CODE FOR ORDERING


BLK| BRN| RED| ORN| YEL| GRN| BLU| PUR| GRY| WHT
10 11 12 13 14 15 16 17 18 19

30 GREAT JONES STREET
NEW YORK, N.Y. 10012-1115
(212) 777-6571 • 1-800-847-4162
FAX (212) 995-0161


BANANA JACKS

09-9124-1-0210 (BLK) PHONE TIP JACK 09-9124-1-0212 (RED) INSULATED

ACCEPTS .080 DIA. PROBE



PHONE TIP JACK INSULATED TYPE
Nickel-plated 7/16" dia. head brass body. Jack has molded Nylon head in choice of colors. Spring of phosphor bronze assures good contact. Mounts in 5/16" hole in panels up to 3/8" thickness. Supplied with hex nut and fiber washer. Available in red & black.




09-9127-1-0210 (BLK) 09-9127-1-0212 (RED)

BANANA JACK INSULATED



BANANA JACK INSULATED TYPE
Molded Nylon head. Nickel-plated brass body. Mounts in any panel up to 3/8" thick, in 5/16" hole. Supplied with hex nut, insulated washer and tinned brass lug. Available in red & black.

ACCEPTS STANDARD BANANA PLUG




09-9128-1-0210 (BLK) 09-9128-1-0212 (RED)

ACCEPTS STANDARD BANANA PLUG



BANANA JACK INSULATED TYPE
Nickel-plated brass body Mounts in any panel up to 3/8" thick in 5/16" hole. Supplied with hex nut, insulated washer, lock washer and tinned brass lug Molded head. Available in red & black.




09-9129-1-0210 (BLK) 09-9129-1-0212 (RED)

BANANA JACK INSULATED



BANANA JACK INSULATED TYPE
With wrap-around terminal. Brass, nickel plated. Molded Nylon head. Available in red & black.

ACCEPTS STANDARD BANANA PLUG




25-9235-1-03XX FINISH COLOR

3 AMPS CAPACITY
2500 WVDC MAX.
115° C. MAX.

Closed entry receptacle (.166) dia. x (.920) deep. Mounts in panels from (.063) to (.375) thick. Nickel plated lockwasher and 1/4-32 hex nut.

COMPONENT NO.	MATERIAL	(03) FINISH
Contact	Brass	Gold
Insulation	Polycarbonate	—
Nut	Brass	Nickel



BLK	BRN	RED	ORN	YEL	GRN	BLU	PUR	GRY	WHT
10	11	12	13	14	15	16	17	18	19



25-9231-1-03XX 25-9232-1-044XX FINISH COLOR


15 AMPS CAPACITY
2500 WVDC MAX.
115° C. MAX.

Closed entry jack (.166) dia. x (.920) deep. Mounts in panels from (.063) to (.375) thick. Nickel plated lockwasher and 1/4-32 hex nut. Available in colors (see color chart).

COMPONENT NO.	MATERIAL	(044) FINISH	(03) FINISH
Contact	Brass	Bright-Tin	Gold
Insulation	Polycarbonate	—	—
Nut	Brass	Nickel	Nickel

BLK	BRN	RED	ORN	YEL	GRN	BLU	PUR	GRY	WHT
10	11	12	13	14	15	16	17	18	19

BANANA PANEL JACK INSULATED




25-9236-1-03XX FINISH COLOR

15 AMPS CAPACITY
2500 WVDC MAX.
115° C. MAX.

Closed entry receptacle (.166) dia. x (.920) deep on (.750) centers. Mounts in panels from (.063) to (.375) thick. Nickel plated lockwasher and 1/4-32 hex nut. One black and one red jack. Choice of black or red mounting base.

AVAILABLE IN BLACK OR RED

COMPONENT NUMBER	MATERIAL	(03) FINISH
Sq. Wrapped Term.	Brass	Gold
Insulation	Polycarbonate	—
Jack Body	Brass	Nickel

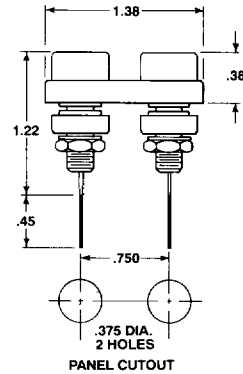

25-9234-1-044XX FINISH COLOR


5 AMPS CAPACITY
2500 WVDC MAX.
115° C. MAX.

One side is a black pin jack for .080 dia. pin and the other is a red banana jack .166 L.D. Mounts in panels (.063) to (.375) thick. Nickel plated 1/4-32 hex nut and lockwasher included

COMPONENT NO.	MATERIAL	(044) FINISH
Contact	Brass	Bright-Tin
Insulation	Polycarbonate	—
Nut	Brass	Nickel

AVAILABLE IN BLACK OR RED

POLARIZED DOUBLE JACK

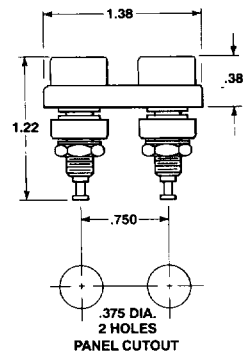


25-9235-1-03XX FINISH COLOR BANANA JACK WITH WRAPPED WIRE TERMINAL

3 AMPS CAPACITY
2500 WVDC MAX.
115° C. MAX.

Closed entry receptacle (.166) dia. x (.920) deep. Mounts in panels from (.063) to (.375) thick. Nickel plated lockwasher and 1/4-32 hex nut.

COMPONENT NO.	MATERIAL	(03) FINISH
Contact	Brass	Gold
Insulation	Polycarbonate	—
Nut	Brass	Nickel



BLK	BRN	RED	ORN	YEL	GRN	BLU	PUR	GRY	WHT
10	11	12	13	14	15	16	17	18	19



25-9233-1-044XX FINISH COLOR


15 AMPS CAPACITY
2500 WVDC MAX.
115° C. MAX.

Closed entry receptacle (.166) dia. x (.920) deep on (.750) centers. Mounts in panels from (.063) to (.375) thick. Nickel plated lockwasher and 1/4-32 hex nut. Model has one black and one red jack.

COMPONENT NO.	MATERIAL	(044) FINISH
Contact	Brass	Bright-Tin
Insulation	Polycarbonate	—
Nut	Brass	Nickel

AVAILABLE IN BLACK OR RED

DOUBLE BANANA JACK



FOR ADDITIONAL SIZES AND MATERIALS, CONTACT FACTORY



CONCORD — BANANA JACKS

09-9125-1-044XX BANANA PANEL JACK INSULATED


RATED FOR 15 AMPERES CONTINUOUS DUTY

Accepts standard banana plugs. Mounts in 5/16" round hole in panel up to 5/16" thick. Available in colors (see color chart).



COMPONENT NO.	MATERIAL	(044) FINISH
Contact	Brass	Bright-Tin
Insulation	Lexan	-
Nut	Brass	Nickel

BLK	BRN	RED	ORN	YEL	GRN	BLU	PUR	GRY	WHT
10	11	12	13	14	15	16	17	18	19



09-9126-1-044XX BANANA PANEL JACK INSULATED


RATED FOR 15 AMPERES CONTINUOUS DUTY

Accepts standard banana plugs. Mounts in 5/16" round or double "D" hole in panel up to 5/16" thick. Available in colors (see color chart).



COMPONENT NO.	MATERIAL	(044) FINISH
Contact	Brass	Bright-Tin
Insulation	Lexan	-
Nut	Brass	Nickel

BLK	BRN	RED	ORN	YEL	GRN	BLU	PUR	GRY	WHT
10	11	12	13	14	15	16	17	18	19



09-9135-1-044XX BANANA PANEL JACK INSULATED


RATED FOR 15 AMPERES CONTINUOUS DUTY

Accepts standard banana plugs. Mounts in 5/16" round hole in panel up to 5/16" thick. Available in colors (see color chart).



COMPONENT NO.	MATERIAL	(044) FINISH
Contact	Brass	Bright-Tin
Insulation	Lexan	-
Nut	Brass	Nickel

BLK	BRN	RED	ORN	YEL	GRN	BLU	PUR	GRY	WHT
10	11	12	13	14	15	16	17	18	19



09-9136-1-044XX BANANA PANEL JACK INSULATED


RATED FOR 15 AMPERES CONTINUOUS DUTY

Accepts standard banana plugs. Mounts in 5/16" round or double "D" hole in panel up to 5/16" thick. Available in colors (see color chart).



COMPONENT NO.	MATERIAL	(044) FINISH
Contact	Brass	Bright-Tin
Insulation	Lexan	-
Nut	Brass	Nickel

BLK	BRN	RED	ORN	YEL	GRN	BLU	PUR	GRY	WHT
10	11	12	13	14	15	16	17	18	19




01-2520-X-044 BANANA JACK SWAGE MOUNT

RATED FOR 15 AMPERES CONTINUOUS DUTY

Accepts standard banana plugs. Body is bright tin plated brass and is heat treated to facilitate swaging.




PART NO.	L	PANEL
01-2520-2	.105	1/16
01-2520-3	.135	3/32
01-2520-4	.165	1/8



01-2510-1-044 BANANA JACK MINIATURE

RATED FOR 15 AMPERES CONTINUOUS DUTY

Accepts miniature banana plug. Body is bright tin plated brass and is heat treated to facilitate swaging.




01-2515-X-044 BANANA JACK

RATED FOR 15 AMPERES CONTINUOUS DUTY

Accepts miniature banana plug. Body is bright tin plated brass and is heat treated to facilitate swaging.



PART NO.	L	PANEL
01-2515-2	.105	1/16"
01-2515-3	.135	3/32"
01-2515-4	.165	1/8"




01-2540-1-02 BANANA JACK

RATED FOR 15 AMPERES CONTINUOUS DUTY

Accepts standard banana plugs. Fits in 1/4" mounting hole. Accommodates panel up to 5/16" thick.



COMPONENT NO.	MATERIAL	(02) FINISH
Body	Brass	Nickel
Lug	Brass	Tinned
Nut	Brass	Nickel




01-2542-1-02 BANANA JACK

RATED FOR 15 AMPERES CONTINUOUS DUTY

Accepts standard banana plugs. Fits in 1/4" mounting hole. Accommodates panel up to 3/8" thick.



COMPONENT NO.	MATERIAL	(02) FINISH
Body	Brass	Nickel
Lug	Brass	Tinned
Nut	Brass	Nickel




01-2405-1-02 BANANA JACK MINIATURE

RATED FOR 15 AMPERES CONTINUOUS DUTY

Accepts miniature banana plugs. Fits in .196 mounting hole. Accommodates panel up to 1/8" thick.



COMPONENT NO.	MATERIAL	(02) FINISH
Body	Brass	Nickel
Lug	Brass	Tinned
Nut	Brass	Nickel



FOR ADDITIONAL SIZES AND MATERIALS, CONTACT FACTORY.

CONCORD ELECTRONICS CORPORATION

30 GREAT JONES STREET
NEW YORK, N.Y. 10012-1115
(212) 777-6571 • 1-800-847-4162
FAX (212) 995-0161