

Dialight

559 Series - Daylight Viewable Snap-in LED - .250" Mounting Hole Panel Mount Indicators



FEATURES / BENEFITS

- ▲ RoHS compliant
- ▲ Long life - typically 100K hours
- ▲ High Brightness for daylight viewing
- ▲ Non-tinted/Non-diffused
- ▲ Low power consumption - uses up to 90% less energy than an incandescent indicator
- ▲ Front panel snap-in mounting requires no additional hardware
- ▲ No heat generated
- ▲ Resistant to shock and vibration
- ▲ Termination - straight terminals for wire wrapping or lead wire for soldering or optional terminals
- ▲ Colors include - red, green, yellow, orange and blue


APPLICATIONS

Dialight's 559 series LED panel mount indicator is available with a variety of LEDs including AlInGaP and InGaN technology for high brightness applications, bicolored and integral resistors. These indicators are designed for a variety of applications such as:

- Main and remote power indication
- Maintenance and warning indication
- Status indication
- Instrumentation
-and many more!

SPECIFICATIONS

- ▲ Voltage requirements:
2.1 - 3.5 VDC typical (current limiting resistor required)
- ▲ Mounting hole size: 0.249 - 0.252" (6.32 - 6.40 mm)
- ▲ Panel thickness: 0.031 - 0.062" (.787 - 1.57 mm)
- ▲ Housing: Black housing material meets UL94V-0 and enhances LED contrast
- ▲ *Operating temperature: -30°C to +85°C
- ▲ *Storage temperature: -40°C to +100°C
- ▲ Electrical connection
Straight terminals for wire wrapping or either 6 or 14 inch 24 AWG lead wire

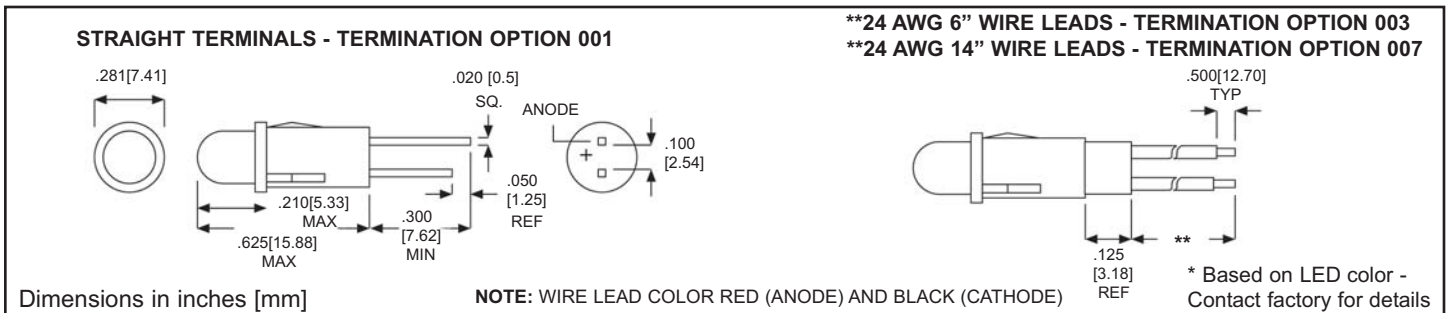

Dialight reserves the right to make changes at any time in order to supply the best product possible.

Dialight Europe Ltd

Exning Road • Newmarket • Suffolk, United Kingdom, CB8 0AX
Tel : +44 (0)1638 666541 • www.dialight.com



Dialight Corporation

1501 Route 34 South • Farmingdale, NJ 07727 USA
Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com



MDEL559DV001_D

NON-TINTED/NON-DIFFUSED

Part Number	Color	Peak Wavelength (nm)	Intensity typ. (mcd)	If typ. (mA)	Vf typ. (V)	Viewing Angle 2Ø 1/2	Max. forward current (mA)	Termination	RoHS Compliant
559-5901-001F	Amber	592	3100	20	2.0	15	50	Straight terminals	✓
559-6001-001F	Blue	470	1500	20	3.6	30	30	Straight terminals	✓
559-6101-001F	Red	635	2100	20	1.9	15	50	Straight terminals	✓
559-6201-001F	Green	525	2200	20	3.5	30	30	Straight terminals	✓
559-6301-001F	Orange	605	1300	20	1.9	15	45	Straight terminals	✓
559-6401-001F	White	*	600	20	3.5	45	30	Straight terminals	✓
559-5901-003F	Amber	592	3100	20	2.0	15	50	6 inch wire leads	✓
559-6001-003F	Blue	470	1500	20	3.6	30	30	6 inch wire leads	✓
559-6101-003F	Red	635	2100	20	1.9	15	50	6 inch wire leads	✓
559-6201-003F	Green	525	2200	20	3.5	30	30	6 inch wire leads	✓
559-6301-003F	Orange	605	1300	20	1.9	15	45	6 inch wire leads	✓
559-6401-003F	White	*	600	20	3.5	45	30	6 inch wire leads	✓
559-5901-007F	Amber	592	3100	20	2.0	15	50	14 inch wire leads	✓
559-6001-007F	Blue	470	1500	20	3.6	30	30	14 inch wire leads	✓
559-6101-007F	Red	635	2100	20	1.9	15	50	14 inch wire leads	✓
559-6201-007F	Green	525	2200	20	3.5	30	30	14 inch wire leads	✓
559-6301-007F	Orange	605	4000	20	1.9	15	45	14 inch wire leads	✓
559-6401-007F	White	*	600	20	3.5	45	30	14 inch wire leads	✓

Typical Operating Characteristics (Ta=25°C)

* White Color Coordinates		
	Min	Max
X	0.23	0.39
Y	0.22	0.42

Dialight reserves the right to make changes at any time in order to supply the best product possible.

LED Panel Mount Indicator Selection

Dialight's line of LED Panel Mount Indicators are available in a variety of sizes and options. Please visit our website for more information. www.dialight.com

- ▶ .156" (3.96mm) *558 Series*
 - ▶ .250" (6.35mm) *559 Series*
 - ▶ 5mm *605 Series*
 - ▶ 6mm *606 Series*
 - ▶ 7mm *607 Series*
- ▶ 8mm *608 Series*
 - ▶ 9mm *609 Series*
 - ▶ 10mm *610 Series*
 - ▶ 11/16" Watertight *557 Series*
 - ▶ 1" Watertight *556 Series*

Dialight Europe Ltd

Exning Road • Newmarket • Suffolk, United Kingdom, CB8 0AX
Tel :+44 (0)1638 666541 • www.dialight.com



Dialight Corporation

1501 Route 34 South • Farmingdale, NJ 07727 USA
Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com



MDEL559DV001_D