



CONTACT DETAIL (5/1)

TYPE NAME OF SYMBOL  
AND LOT No. (DATE)  
(SEE TABLE)

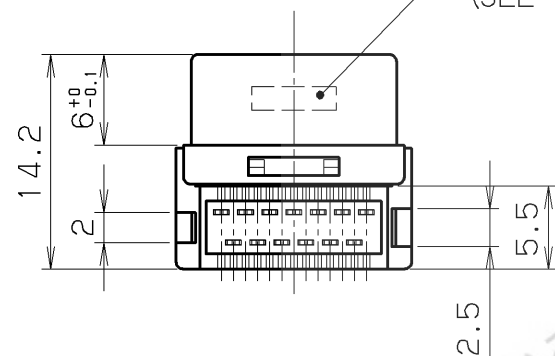

- NOTE 1. CONTACT PLATING  
GOLD 0.76μm MIN. ON MATING AREA,  
GOLD 0.05μm ON TERMINATION AREA,  
ALL OVER NICKEL 1.5μm MIN. UNDERPLATED.
2. APPLICABLE CONNECTOR AND COVER  
HDR-EA ( ) LMY ( ) G1-SLE+, HDR-E ( ) LP ( )
3. ASS'Y TOOLS  
FHAT-0004A: PROTRUDE WIRE CUT  
FHPT-0004A: IDC PRESS
4. SPECIFICATION  
RATED CURRENT 0.5A (PEAK TO PEAK 1A) / 1 CONTACT  
RATED VOLTAGE 125V AC (r. m. s.)



PART NO.	APPLICABLE WIRE SIZE	TYPE NAME SYMBOL	CABLE HOUSING COLOR
HDR-E ( ) FG1+	28AWG (7/0.127) INSULATION O.D Ø0.58	FG1	BLACK
HDR-E ( ) FAG1+	30AWG (7/0.1) INSULATION O.D Ø0.58	FAG1	BLACK
HDR-E ( ) FBG1+	32AWG (7/0.08) INSULATION O.D Ø0.44	FBG1	GLAY

LTR.	DATE	BY	REV.	DESCRIP	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
					5	CABLE HOUSING	PBT	2		UL94V-0 SEE TABLE
					4	SPACER	PBT	2		UL94V-0 BLACK
					3	INSULATOR	PBT	1		UL94V-0 BLACK
					2	SHELL	STEEL	1	NICKEL PLATING	—
					1	FEMALE CONTACT	PHOSPHOR BRONZE	n	NOTE#1	—
	DATE Mar. -29 2004		SCALE 2/1		UNIT mm (INCH)	3RD. A. P	HONDA TSUSHIN KOGYO CO., LTD.			
	APP. DATE&REV.									
	DR.	DE.	CHK.	CHK.	APP.		NAME	0.8mm SPACING SHIELDED BOARD TO CABLE FEMALE CONNECTOR (IDC)		
	Y. KATO	Y. KATO	—	C. NUNOKAWA	H. EBIHARA		PART NO.	HDR-E ( ) F ( ) G1+		

HDR-E26F ( ) G1+	15.6	0.8x12=9.6	13.6
HDR-E14F ( ) G1+	10.8	0.8x6=4.8	8.8
PART No.	A	B	C