
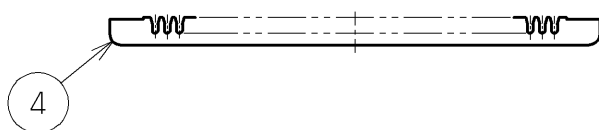
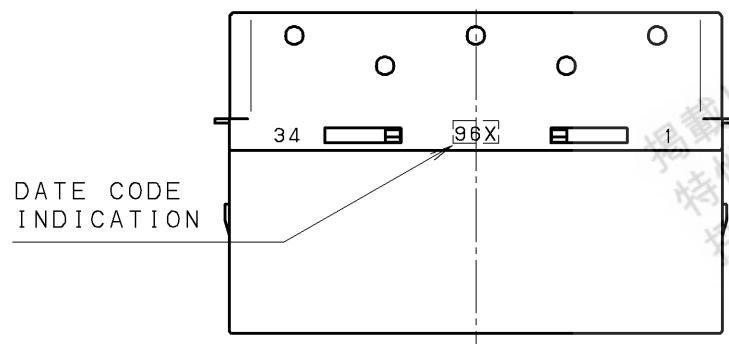


CONTACT DETAIL  
(5/1)

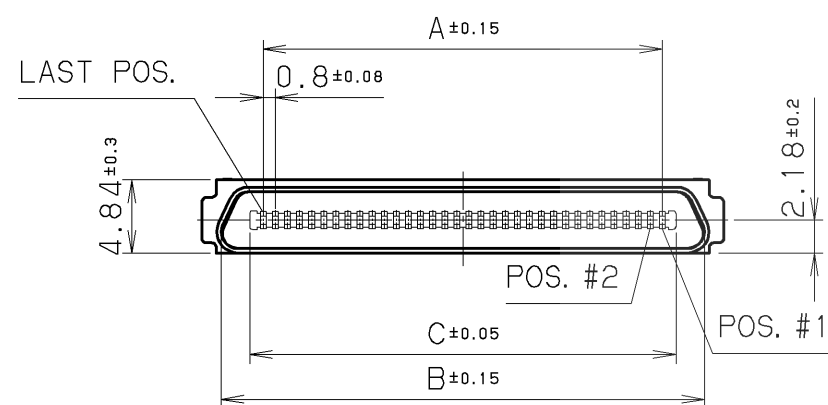

- NOTE1. CONTACT PLATING  
 CONTACT AREA: Pd/Ni 0.5 μm + GOLD 0.1 μm MIN.  
 TERMINAL AREA: GOLD 0.05 μm  
 ALL OVER NICKEL UNDERPLATED
2. APPLICABLE CABLE COVER: P/N: HDRA-E ( ) LGKP ( )  
 3. MATING CONNECTOR: P/N: HDRA-E ( ) LFDT-SL+  
 4. APPLICABLE WIRE SIZE AWG#30 (7/0.1)  
 Ø0.58 (CORE JACKET O. D.)

5	INSULATOR B	PBT (GF)	1		UL94V-0 BLACK
4	CABLE HOUSING	PBT (GF)	2		UL94V-0 BROWN
3	SHELL	STEEL	1	NICKEL PLATING	
2	INSULATOR A	PBT (GF)	1		UL94V-0 BLACK
1	CONTACT	PHOSPHOR BRONZE	68	SEE NOTE 1	

LTR.	DATE	BY	REV.	DESCRIPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE	
	Mar. 29. 2004		2 / 1								
DATE						SCALE		UNIT		3RD. A. P	
APP. DATE & REV.						HONDA TSUSHIN KOGYO CO., LTD.					
DR.	DE.	CHK.	CHK.	APP.	NAME		0.8mm SPACING FOR CABLE IDC MALE CONNECTOR				
Y. KATO	Y. KATO	—	C. NUNOKAWA	H. EBIHARA	PART NO.		HDRA-E ( ) MA1+ REV.				

HDRA-E68MA1	68	0.8x33=26.4	31.95	28.2
HDRA-E36MA1	36	0.8x17=13.6	19.16	15.4
PART No.	No. OF POS.	A	B	C

※ UNDER CONSIDERATION