

IDC type female connector for cable

RPS-()FK()-()+

1.27 mm pitch connector

For cable

IDC (1.27 mm)

For flat cable

RoHS




● Configuration of product Part No.

RPS- () FK ()- ()+

① ② ③ ④ ⑤

- ① Series name
- ② No. of contacts: 20, 26, 34, 40, 50, 52, 60, 68, 80, 100 or 120
- ③ Type of contact
FK: Female
- ④ Compatible cable
Blank: #28AWG (7/0.127) Flat cable } t=1mm or less
 #30AWG (1/0.254) Flat cable }
B : #30AWG (7/0.1) Flat cable t=1mm or less
- ⑤ Misinsertion-prevention-key grooves
Blank: None
For using key grooves, refer to the drawing shown below.

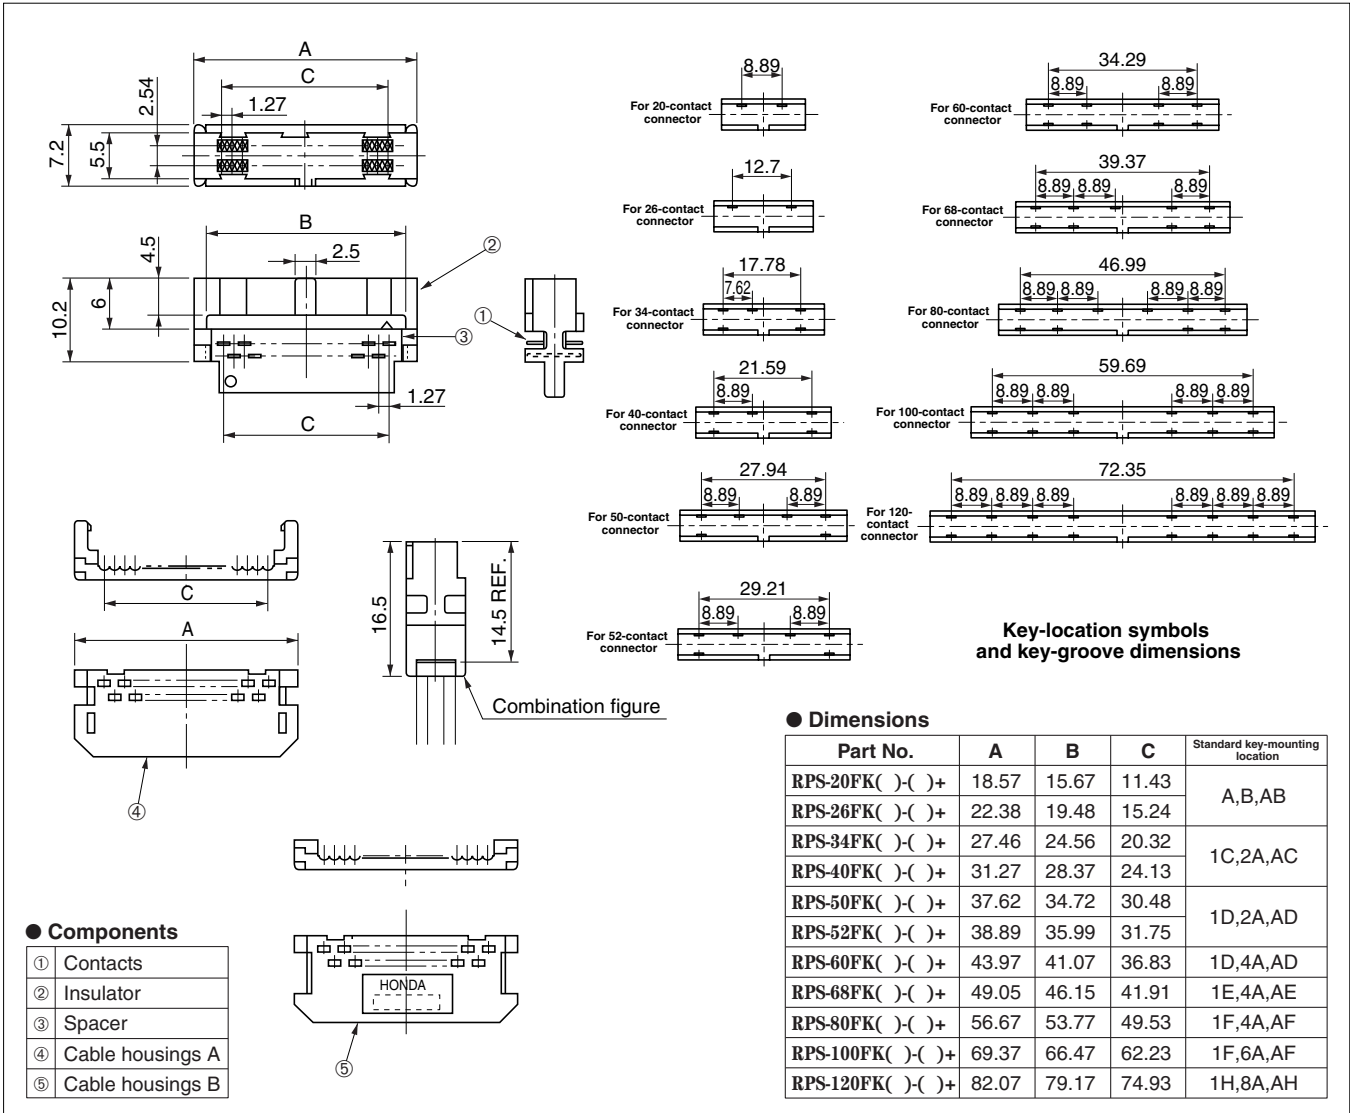

● Components

| | |
|---|------------------|
| ① | Contacts |
| ② | Insulator |
| ③ | Spacer |
| ④ | Cable housings A |
| ⑤ | Cable housings B |

Mating connectors: RPS-()RM+, RPS-()RLM+, RPS-D40MB+ (40-contact connector only)

Accessories: RPS-PK

Tool: IDC locator: FLPT-0003C-(No. of contacts), Hand presser: MFC-K1 (Refer to page Tool-13)