


ATE Spring Probes

Two-Part Test Probes for 1.27mm Pitch


- ❖ Two piece test probe – probe can be replaced when damaged or worn out, without re-soldering to test jig.
- ❖ Sleeve can be assembled as either interference fit to a test jig, and wire attached to the rear bore, or clearance fit and soldered to a PCB for electrical connection.
- ❖ Slim miniature probes, suitable for mounting at 1.27mm pitch between centres.

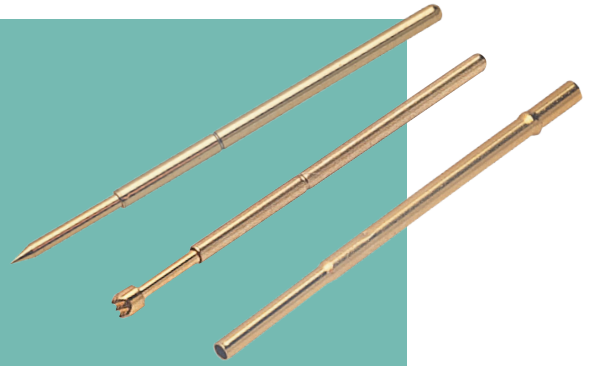


SPRING PROBES

❖ Mechanical

Full travel: 2.65mm
 Spring force
 At full travel: 1.18N
 At 2/3 travel: 0.88N

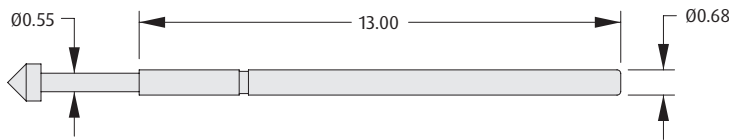


SPEAR HEAD




ORDER CODE
P13-0123

CONCAVE HEAD




ORDER CODE
P13-1123

CONVEX HEAD



ORDER CODE
P13-2123



SERRATED HEAD



ORDER CODE
P13-4023

SLEEVE

- ❖ Suitable for use with 30AWG wire.

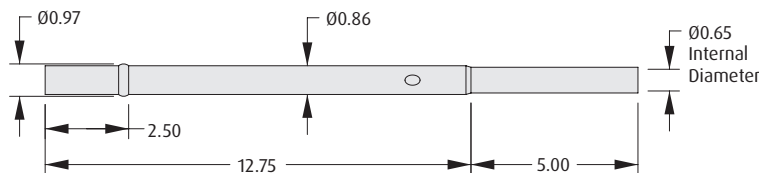

ORDER CODE
S13-503

All dimensions in mm.