


SDP8276

Silicon Photodiode

FEATURES

- Side-looking plastic package
- Linear response
- Fast response time
- Internal visible light rejection filter
- 50° (nominal) acceptance angle
- Mechanically and spectrally matched to SEP8506 and SEP8706 infrared emitting diodes

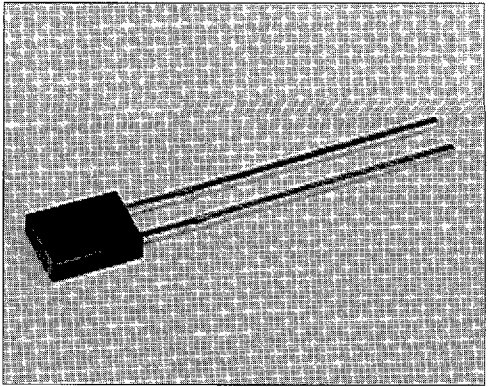


INFRA-79.TIF

DESCRIPTION

The SDP8276 is a PN silicon photodiode, transfer molded in a side-looking black plastic package, to minimize the effects of visible ambient light. The chip is positioned to accept radiant energy through a lens on the side of the package. The SDP8276 photodiode offers fast response time and a linear output. It is ideal for battery powered systems or anywhere power is at a premium.

OUTLINE DIMENSIONS in inches (mm)

Tolerance	3 plc decimals	±0.005(0.12)
	2 plc decimals	±0.020(0.51)

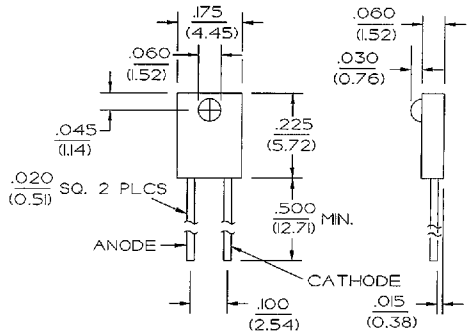

DIM_074.cdr

4551830 0022521 697

Honeywell

SDP8276

Silicon Photodiode

ELECTRICAL CHARACTERISTIC (25°C unless otherwise noted)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Light Current SDP8276-001	I_L	4	7		μA	$V_R=20 V$ $H=1 mW/cm^2$ (1)
Dark Current	I_D			50	nA	$H=0, V_R=20 VDC$
Reverse Breakdown Voltage	V_{BR}	50			V	$I_R=10 \mu A, H=0$
Angular Response (2)	\emptyset		50		degr.	$I_F=Constant$
Rise And Fall Time	t_r, t_f		50		ns	$V_R=20 V, R_L=50 \Omega$

Notes

1. The radiation source is an IRED with a peak wavelength of 935 nm.
2. Angular response is defined as the total included angle between the half sensitivity points.

ABSOLUTE MAXIMUM RATINGS


(25°C Free-Air Temperature unless otherwise noted)

Operating Temperature Range	-40 to +85°C
Storage Temperature Range	-40 to +85°C
Soldering Temperature (5 sec)	240°C
Cathode Anode Voltage	50 V
Power Dissipation	100 mW (1)

Notes

1. Derate linearly from 25°C free-air temperature at the rate of 0.78 mW/°C.

SCHEMATIC

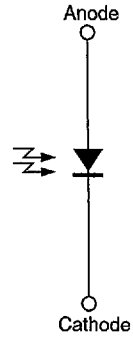

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

4551830 0022522 523
Honeywell

SDP8276

Silicon Photodiode

SWITCHING TIME TEST CIRCUIT

cir_001.odr

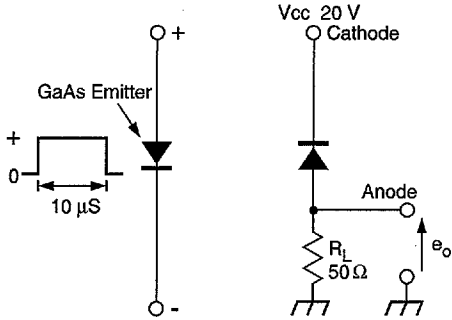


Fig. 1 Responsivity vs Angular Displacement

gra_054.ds4


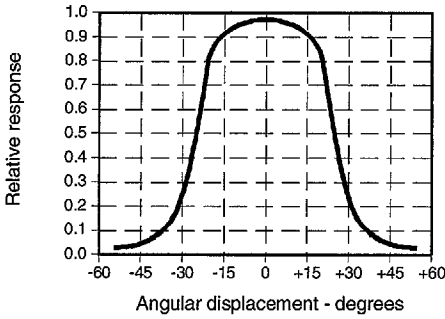


Fig. 3 Spectral Responsivity

gra_050.ds4

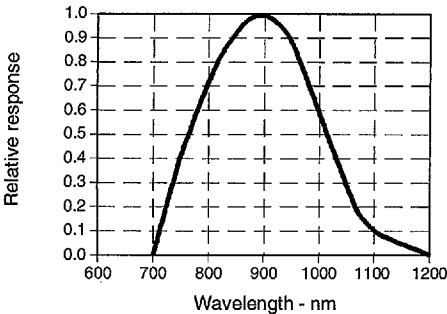

All Performance Curves Show Typical Values

SWITCHING WAVEFORM

cir_002.odr


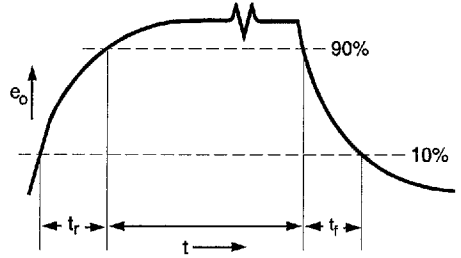


Fig. 2 Dark Current vs Temperature

gra_304.odr

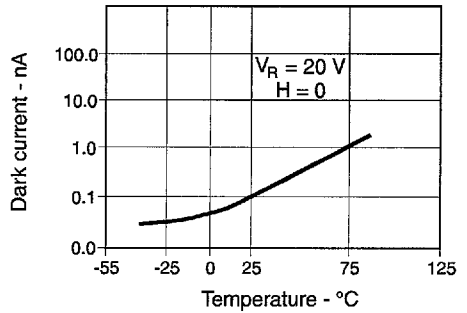

4551830 0022523 46T

Honeywell

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.