
OCTIS RECEPTACLE KIT UNIVERSAL



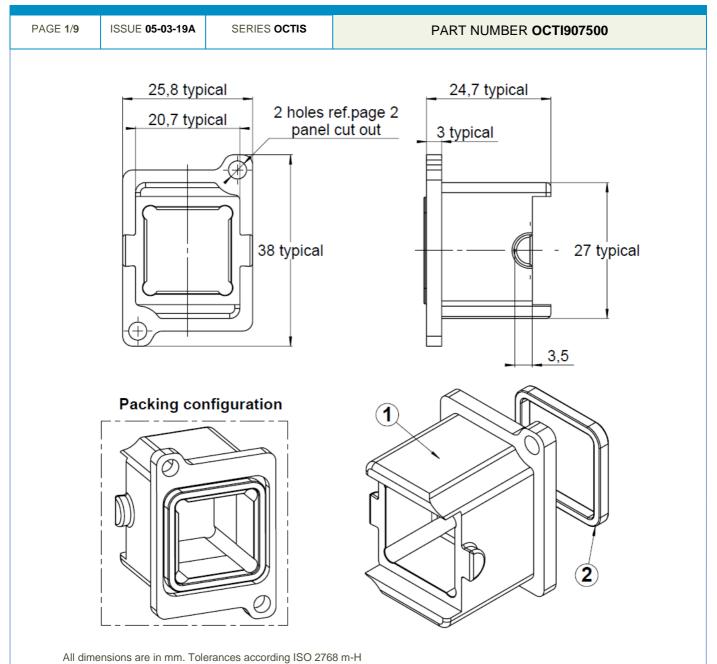

DESCRIPTION

REP	COMPONENT	MATERIALS	PLATING
1	Screwable Receptacle Body	ALUMINIUM	CHEMICAL PASSIVATION
2	Panel Sealing Gasket	SILICONE	-


OCTIS RECEPTACLE KIT UNIVERSAL



PAGE 2/9	ISSUE 05-03-19A	SERIES OCTIS	PART NUMBER OCTI907500			
GENERAL CHARACTERISTICS						
Mechanical Mating e Vibratio Weight		IEC 61300-2-2 IEC 61300-2-1	100 - 17.2900			
Environmental Protection class Operating temperature (°C) Storage temperature (°C) Salt Mist RoHS Flammability UVB Resist (h)		IEC 60529 IEC 61300-2-22 IEC 61300-2-22 IEC 61300-2-26 (ISO21207 method B) - UL 94 ASTM G154	IP67 * -40 / +85 -65 / +85 720h * Compliant V0 1000			
Others: Equipm Packagi	ent interface ng	-	For use with OCTIS [™] plug or receptacle cap Trays in card board box 24 pcs by tray			


* When mated with corresponding Radiall OCTIS plug

PANEL CUT OUT

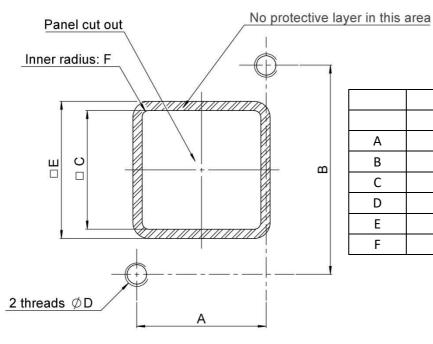


	mm		
	Min.	Max.	
А	19.7	19.9	
В	31.9	32.1	
С	16.5	16.8	
D	M3	-	
E	19.5	20	
F	_	0.5	


OCTIS RECEPTACLE KIT UNIVERSAL

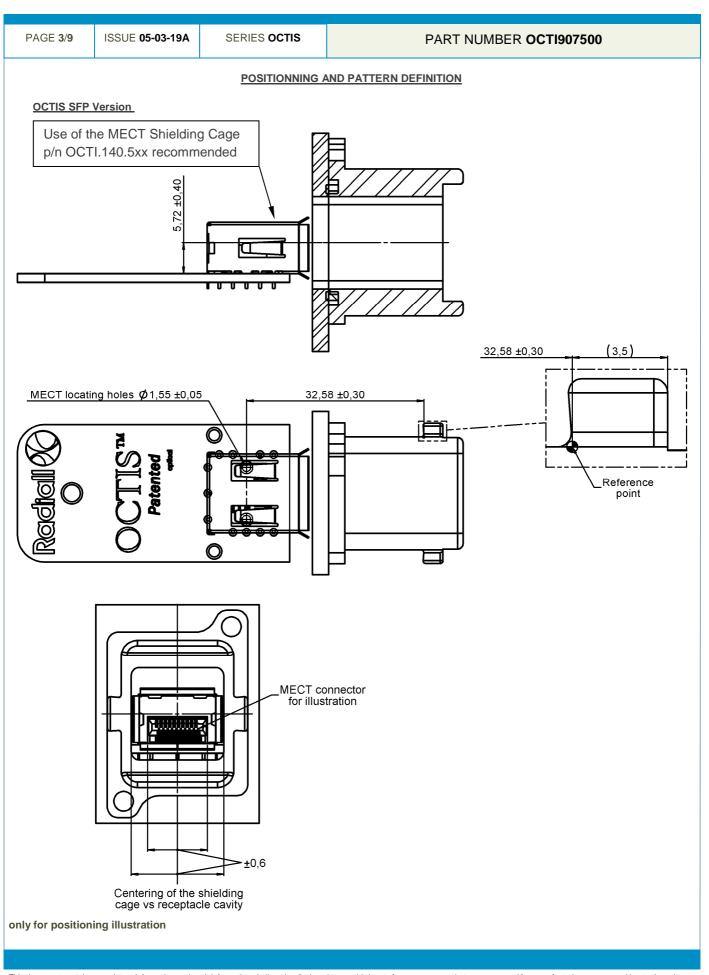

OCTIS RECEPTACLE KIT UNIVERSAL

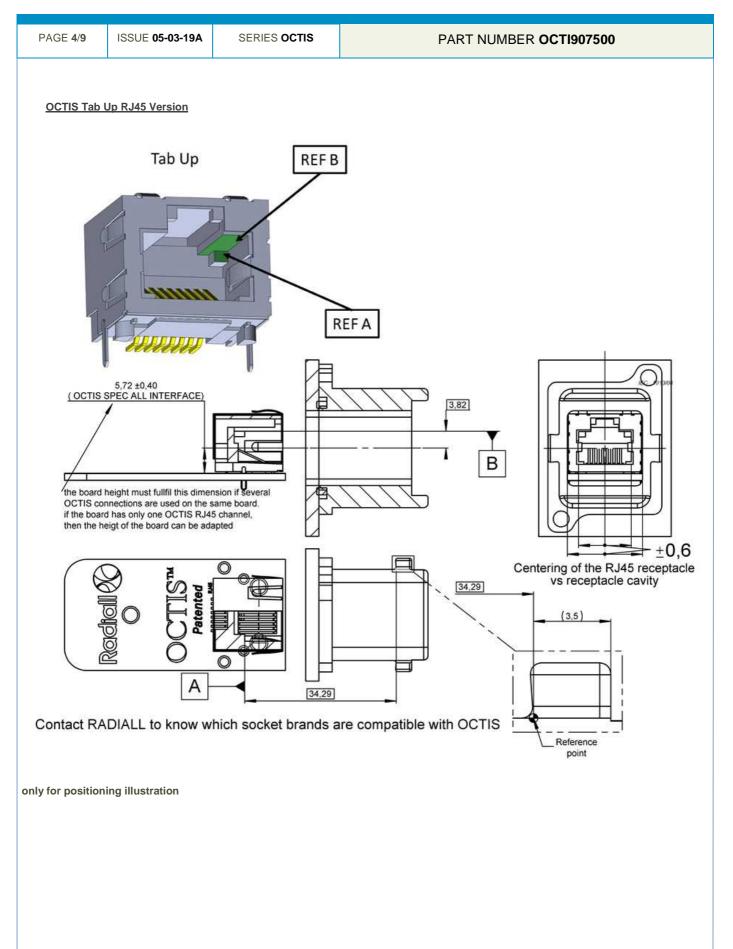


OCTIS RECEPTACLE KIT UNIVERSAL

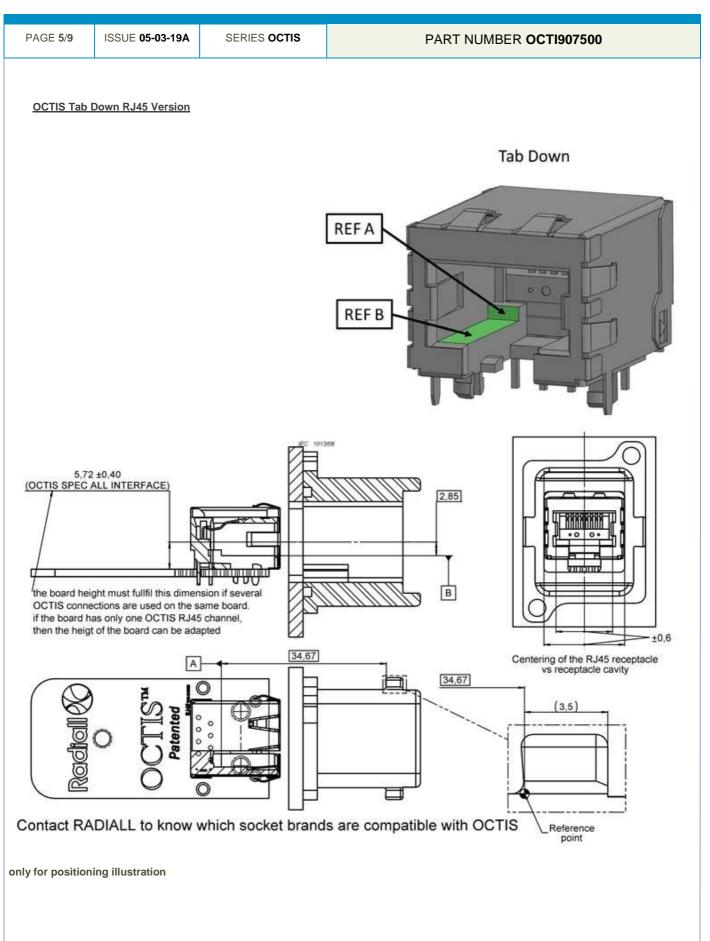


OCTIS RECEPTACLE KIT UNIVERSAL




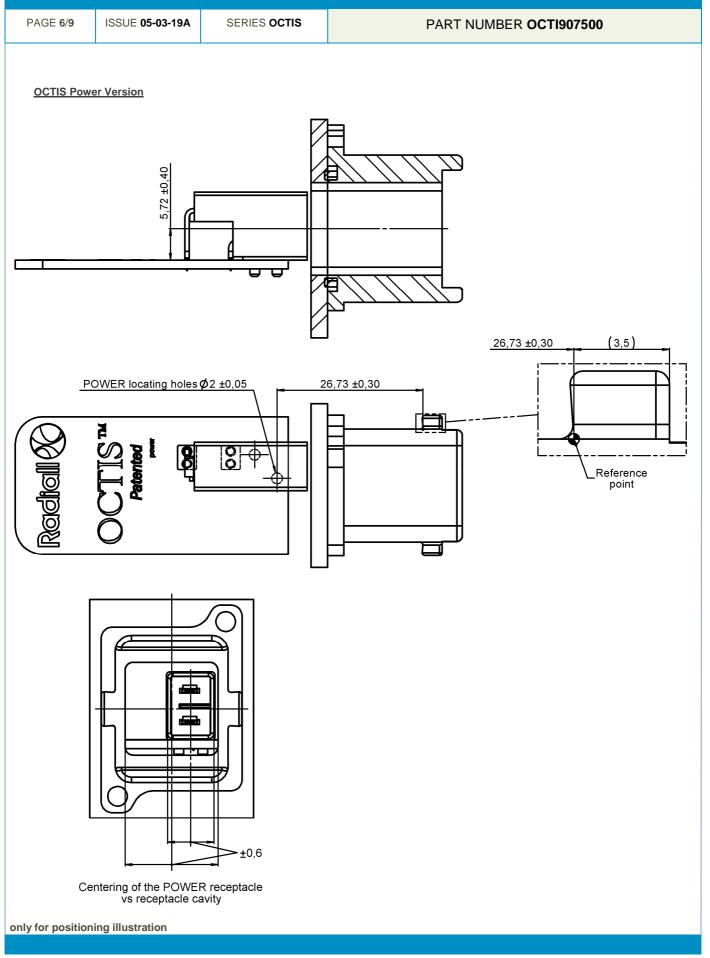

OCTIS RECEPTACLE KIT UNIVERSAL

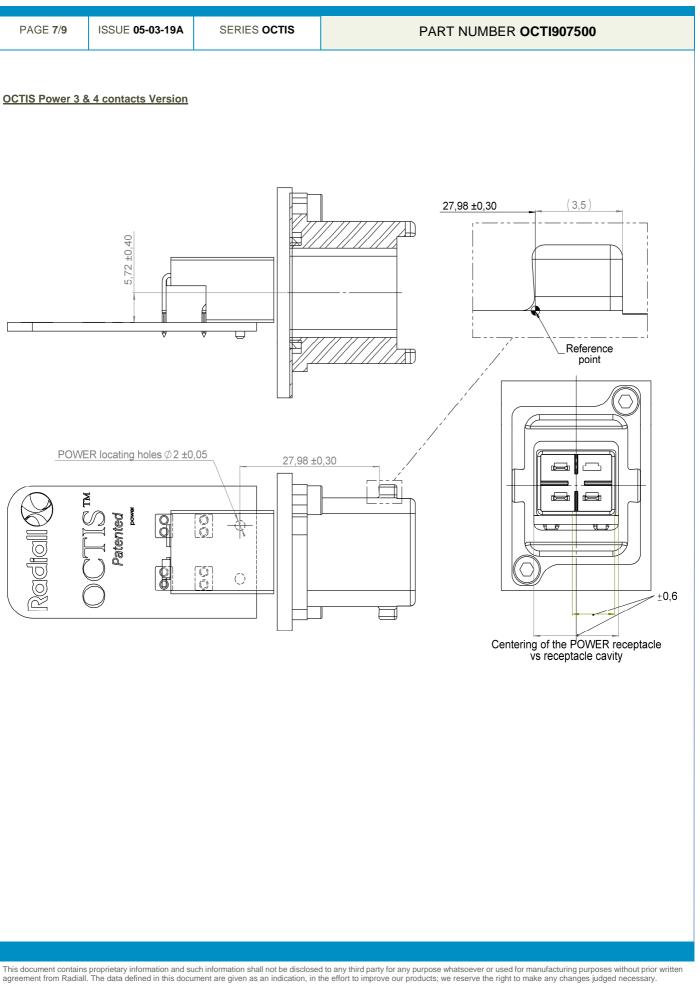

OCTIS RECEPTACLE KIT UNIVERSAL

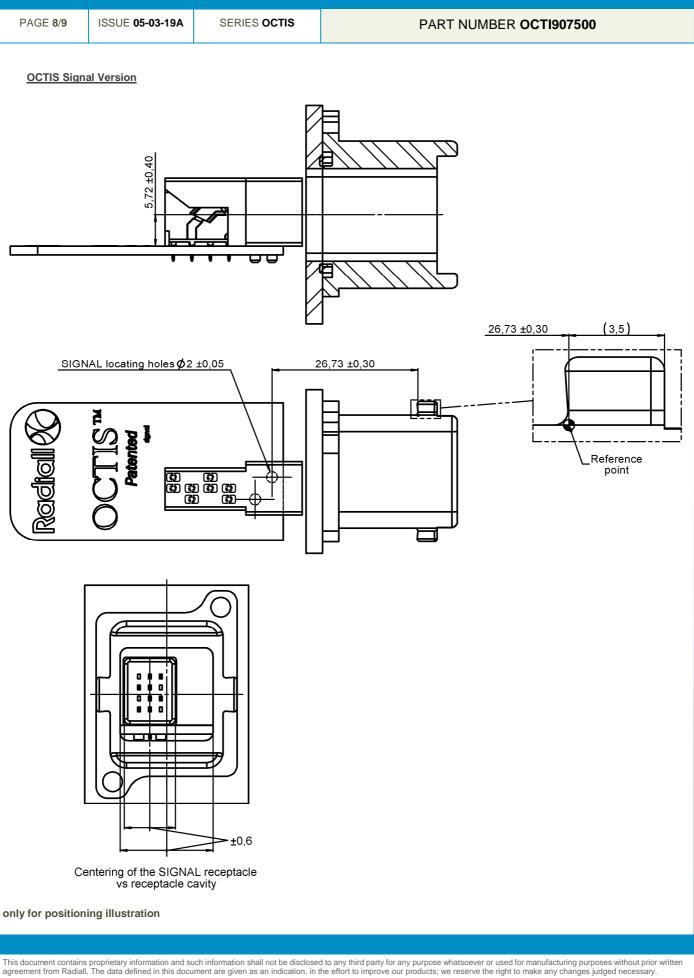

OCTIS RECEPTACLE KIT UNIVERSAL

