NOTES: **REVISION DM** SFM-1XX-XX-XXX-D-XXX 1. © REPRESENTS A CRITICAL DIMENSION. 2. MINIMUM PUSHOUT FORCE: .5 LB. No OF POSITIONS -**OPTIONS**  $\langle C \rangle$ 3. COPLANARITY: .004[0.10] = POS 05 THRU 26 (LEAVE BLANK FOR STANDARD ALL POSITIONS AVAILABLE .006[0.15] = POS 27 THRU 50 -02 THRU -50 `AND USE SFM-XX-D) 4. TUBE ALL POSITIONS. PARTS TO BE TUBED WITH (USE BODY: SFM-XX-D-XX-X) -N: NO POLARIZATIÓN NOTCH NOTCH GOING WITH ARROW. (USE SFM-XX-D-XX-N) 5. PINS CAN BE ORIENTED IN ANY DIRECTION; -A: ALIGNMENT PIN (USÉ SFM-XX-D-A-X) BOTH ROWS MUST FACE SAME WAY. 6. SEE NOTCH FOR PROPER ORIENTATION LEAD STYLE . (SEE FIG 4, SHT 2) -LC: LOCKING CLIP (SEE FIG 6, SHT 3 & NOTE 8) 7. MAXIMUM PIN HEIGHT VARIATION: .003[0.08]. -01: THROUGH HOLE MUST BE MEASURED BETWEEN ADJACENT PINS (AVAILABLE ON ALL LEADS) USE CONTACT: C-44-01-XXX) AND THE SAME ROW AND BETWEEN ROWS. -P: PICK AND PLACE PAD SEE FIG 1, SHT 1) 8. DUE TO HIGH AMOUNT OF INSERTION FORCE (SEE FIG 5, SHT 2) -02: SURFACE MOUNT NEEDED, THE -LC OPTION IS NOT COMPATIBLE WITH (AVAILABLE ON '5 THRU 50 POSITION ONLY) (USE CONTACT: C-44-02-XXX) AUTO PLACEMENT. SAMTEC RECOMMENDS MANUAL PLACEMENT FOR ALL ASSEMBLIES WITH THE -LC OPTION. (SEE FIG. 2, 3FI 2)

-03: STRAIGHT MODIFIED -TR: TAPE & REEL (SEE SHT 4) (NOT AVAILABLE WITH -DS OPTION) 9. DIMENSION TO BE MEASURED AT BEND. -K: POLYIMIDE FILM PAD (.005[0.13] THICKNESS) (USE CONTACT: C-44-03-XXX) (SEE FIG 3, SHT 2) (USE K-DOT-.157-.250-.005) -SN: SOLDER NAIL FOR .062 BOARD \*: DIMENSIONS N/A FOR -N OPTION (SEE FIG 1, SHT 1) -L1: THROUGH HOLE (LOW INSERTION) (SFM-XX-D-SN AND WT-27-01-T) (USE CONTACT: C-61-01-XXX) (AVAILABLE WITH LEAD STYLE -02, -L2 & -T2) \*.145[3.68] REF SEE FIG 1, SHT 1) (NOT AVAILABLE WITH -A & -LC) -L2: SURFACE MOUNT (LOW INSERTION) -SN2: SOLDER NAIL FOR .093 BOARD (USE CONTACT: C-61-02-XXX) \*.020 0.51 REF (SFM-XX-D-SN AND WT-27-02-T) SEE FIG 2, SHT 2) AVAILABLE WITH LEAD STYLE -02, -L2 & -T2) .120 [3.05] REF -L3: STRAIGHT MODIFIED (LOW INSERTION) \*.080 [2.03] REF (NOT AVAILABLE WITH -A & -LC) (USE CONTACT: C-61-03-XXX) .050 [1.27] -DS: DUAL SCREW DOWN FOR .062 BOARD SEE FIG 1, SHT 1) 02 REF (SEE FIG 8, SHT 3) -T1: THROUGH HOLE (PHOS BRONZE) ONLY AVAILABLE WITH -01, -02 AND -03 LEAD (USE CONTACT: C-119-01-XXX) **46666** STYLE) (NOT AVAILABLE WITH OPTIONS -N, -A, Ģ (SEE FIG 1, SHT 1) -LC, -P, -TR, -K, -SN AND SN2), (USES SFM-XX-D-DS, -T2: SURFACE MOUNT (PHOS BRONZE) (USE CONTACT: C-119-02-XXX) CPS-RR-XX-XX-X, ACCRT-01 AND WT-27-XX-T 01 ALWAYS FILLED) ÍSEE FIG 2, SHT 2) q .050 [1.27] REF BODY SPECIFICATION -D: DOUBLE ROW **PLATING SPECIFICATION** (NO. OF POS x .050[1.27]) + .015[0.38] REF -S: 30µ" SELECTIVE GOLD IN CONTACT AREA, q MÄTTE TIN ON TAIL SFM-XX-D-LC-X (NO. OF POS x .050[1.27]) + .155[3.94] REF -F: 3µ" FLASH SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL C-XX-01-XXX -H: 30µ" HEAVY GOLD IN CONTACT AREA, 3µ" GOLD ON TAIL (SEE NOTE 5) -L: 10µ" LIGHT SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL .180 [4.57] REF .015[0.38] REF -STL: 30u" SELECTIVE GOLD IN CONTACT AREA. .110[2.79] REF TIN/LEAD (90/10+/-5%) TAIL (ONLY AVAILABLE ON -02 OR -L2 LEADSTYLES) "A" (C) -SM: 30µ" SELECTIVE GOLD IN CONTACT AREA, MÄTTE TIN ON TAIL (SEE TABLE 1) -FM: 3u" FLASH SELECTIVE GOLD IN CONTACT AREA. MATTE TIN ON TAIL – 2° MAX SWAY (TYP) -LM: 10µ" LIGHT SELECTIVE GOLD IN CONTACT AREA, "B" REF MÄTTE TIN ON TAIL .050[1.27] (C) (NO OF POS x .050[1.27]) - .050[1.27] REF 1° MAX SECTION "A"-"A" SWAY (TYP) FIG 1 PROPRIETARY NOTE UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. THROUGH HOLE/STRAIGHT MODIFIED THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN. TOLERANCES ARE: MANUEACTURING REPRODUCTION USE PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, DECIMALS ANGLES INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOL .XX: ±.01 [.3] .XXX: ±.005 [.13] 520 PARK EAST BLVD, NEW ALBANY, IN 47150 REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY PHONE: 812-944-6733 FAX: 812-948-5047 OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS .XXXX: ±.0020 [.051] WRITTEN CONSENT OF SAMTEC INC e-Mail info@SAMTEC.com code 55322 TABLE 1 DO NOT SCALE DRAWING .050 x .050 SOCKET STRIP DOUBLE ROW ASSEMBLY SUFFIX TAIL LENGTH "A" TAIL WIDTH "B" INSULATOR: LCP UL 94V-O, COLOR: BLACK CONTACT: TIGER EYE: BeCu -X1 .120[3.05] .020[0.51] TIGER EYE LITE: PHOSPHOR BRONZE SFM-1XX-XX-XXX-D-XXX

\DWG\MISC\MKTG\SFM-1XX-XX-XXX-D-XXX-MKT.SLDDRW


BY: JORDAN 12/11/89


SHEET 1 OF 4


-X3


.075[1.91]


.016[0.41]

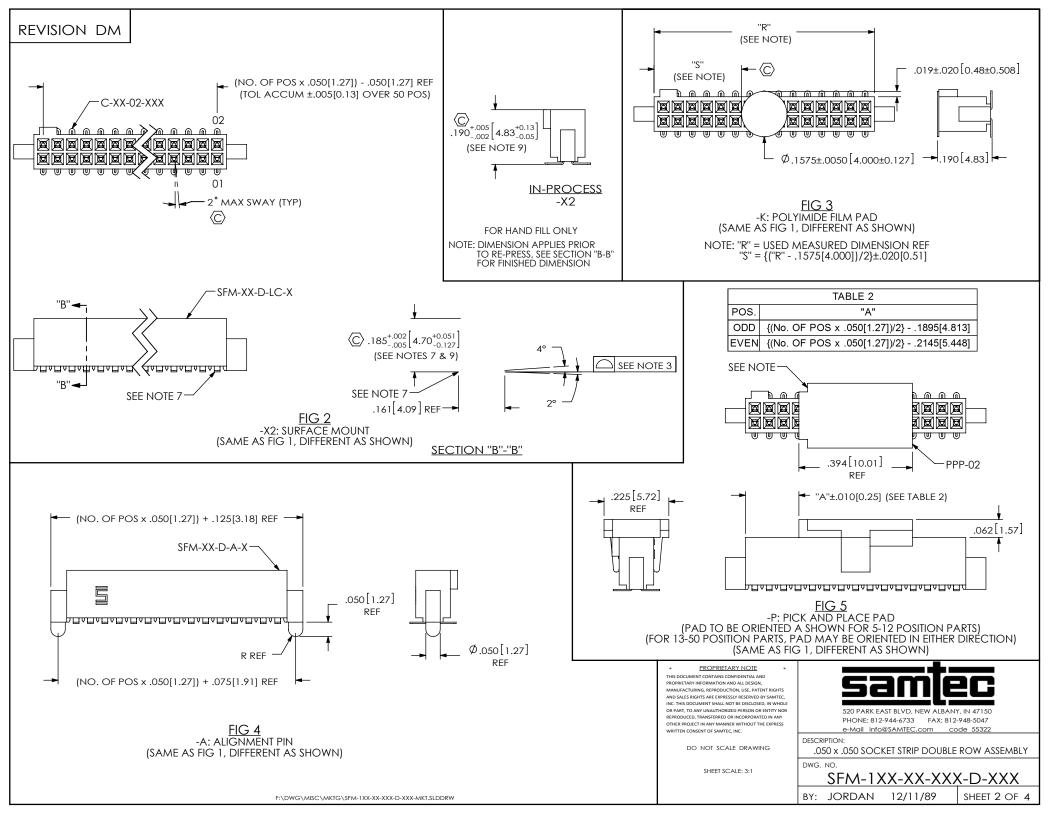


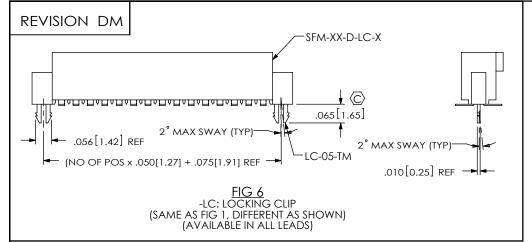

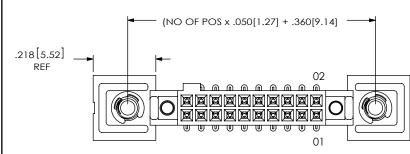





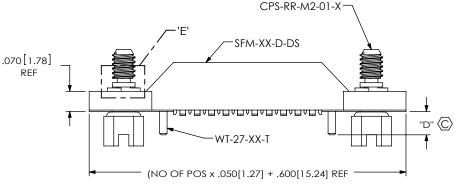




TABLE 3	
OPTION "C"	
-SN	.076[1.93]
-SN2	.110[2.79]

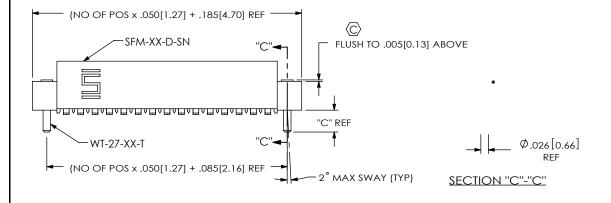


FIG 7 -SNX: SOLDER NAIL

(SAME AS FIG 1, DIFFERENT AS SHOWN)




FIG 8 -DS: DUAL SCREW DOWN (SAME AS FIG 2, DIFFERENT AS SHOWN)

## \* PROPRIETARY NOTE

PROPRETARY INFORMATION AND ALL DESIGN.

MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS
AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMITEC,
INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE
OR PART, TO ANY UNALTHORIZED PERSON OR ENTITY NOR
REPRODUCED, TRANSFERRED OR INCORPORATE IN ANY
OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS
WRITTEN CONSENSOR OF SAMITEC, IN

DO NOT SCALE DRAWING

SHEET SCALE: 3:1

## samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322

DESCRIPTION:

.050 x .050 SOCKET STRIP DOUBLE ROW ASSEMBLY


VG NO


SFM-1XX-XX-XXX-D-XXX

BY: JORDAN 12/11/89

SHEET 3 OF 4

F:\DWG\MISC\MKTG\SFM-1XX-XXX-D-XXX-MKT.SLDDRW

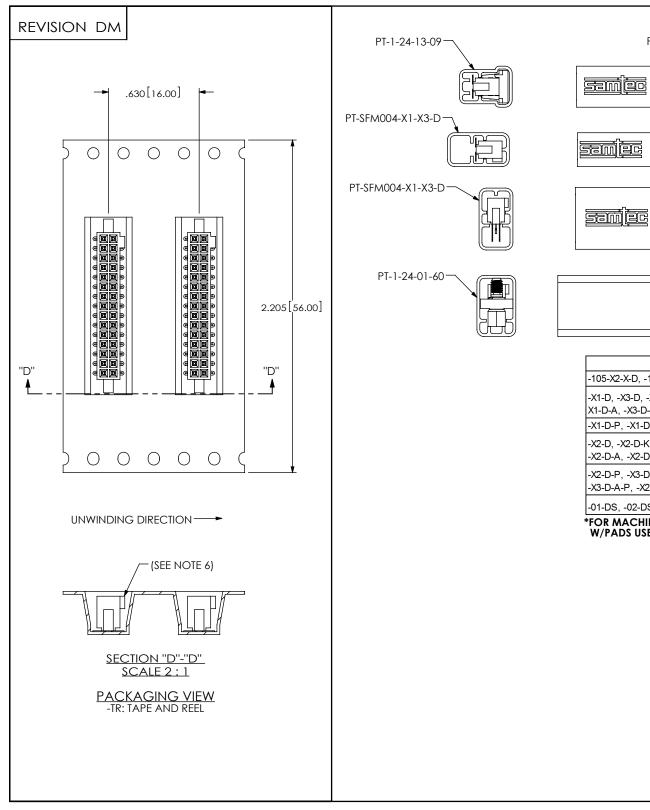

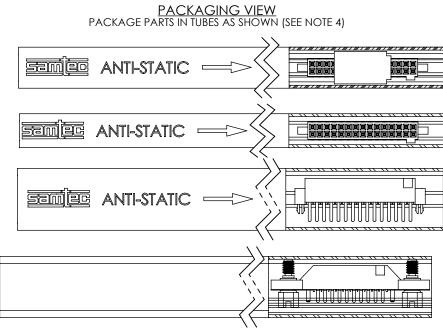

LEAD STYLE	PACKAGING TUBE	PLUG
LEAD STYLE	PACKAGING TUBE	PLUG
-105-X2-X-D, -105X2-X-D-LC, -105-X2-D-A, -105-X2-D-K-LC	PT-1-24-14-09	TP-24-02
-X1-D, -X3-D, -X1-D-LC, -X3-D-LC, <b>(NO P&amp;P PAD)</b> , X1-D-A, -X3-D-A, -X1-D-K, -X3-D-K	PT-SFM004-X1-X3-D	TP-24-02
-X1-D-P, -X1-D-LC-P (WITH P&P PAD), X1-D-A-P	PT-1-24-02-17	TP-09
-X2-D, -X2-D-K, -X2-D-LC (NO P&P PAD), -X2-D-A, -X2-D-K-A, -X2-D-LC-K, -X2-D-SNX	PT-SFM004-X1-X3-D	TP-24-02
-X2-D-P, -X3-D-P, -X2-D-LC-P (WITH P&P PAD), -X2-D-A-P, -X3-D-A-P, -X2-D-P-SNX	PT-1-24-13-09	TP-24
-01-DS, -02-DS, -03-DS	PT-1-24-01-60	TP-03

\*FOR MACHINE LOADING OF TUBES FOR PARTS W/O PADS USE PT-1-24-14-09, W/PADS USE PT-1-24-13-09

5 POS -01 AND -03 LEAD STYLES MAY BE TUBED USING PT-1-24-15-09, TP-24-02 2 POS -X1 STYLE TO BE TUBED IN PT-1-24-15-09

F:\DWG\MISC\MKTG\SFM-1XX-XXX-D-XXX-MKT.SLDDRW

## \* PROPRIETARY NOTE THIS DOCUMENT CONTAINS CONFIDENTIAL AND

PROPRIETARY INFORMATION AND ALL DESIGN,
MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS
AND SALES RIGHTS, ARE CEPRESSLY RESERVED BY SAMFEC,
INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE
OF PART, TO ANY MAUNTHORIZED REPROSON GE ENTITY NOR
REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY
OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS
WRITTER CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 1.5:1



520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322

DESCRIPTION:

.050 x .050 SOCKET STRIP DOUBLE ROW ASSEMBLY

DWG. NO.

SFM-1XX-XX-XXX-D-XXX

BY: JORDAN 12/11/89

SHEET 4 OF 4