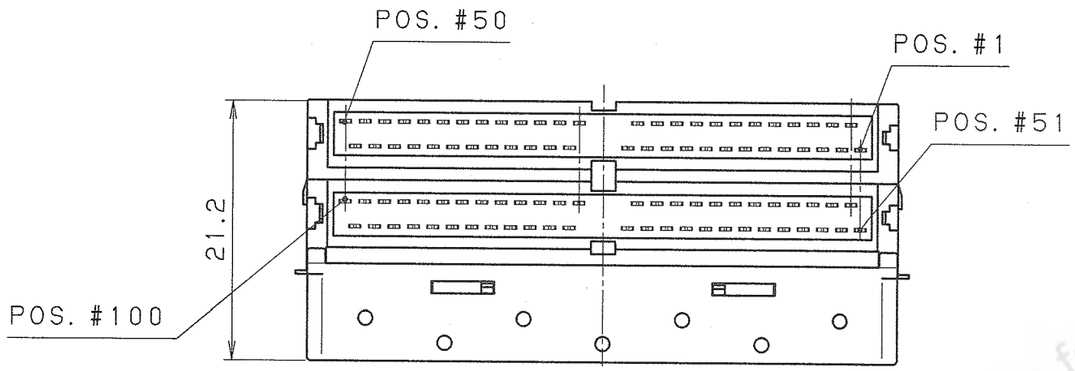

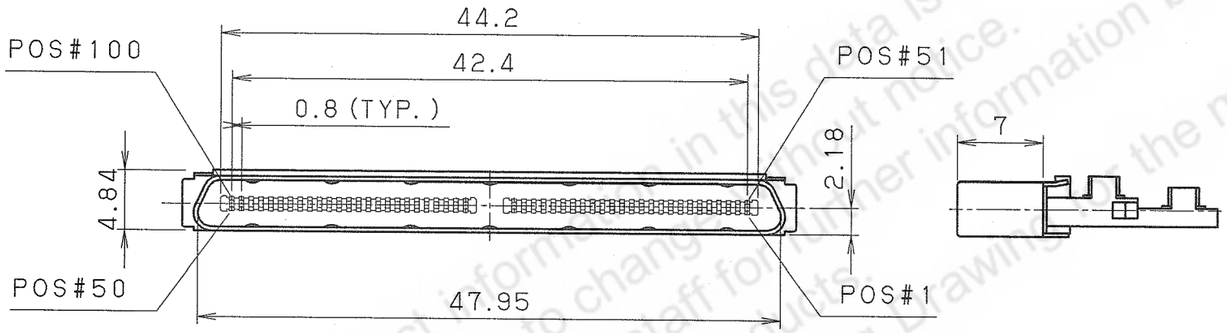

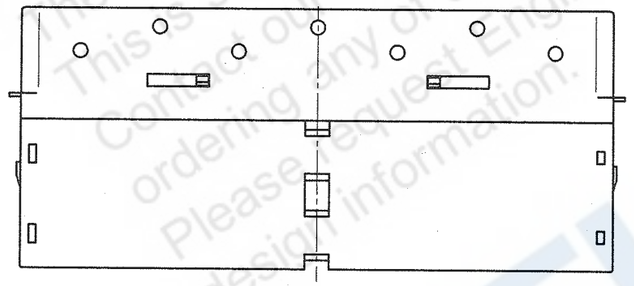



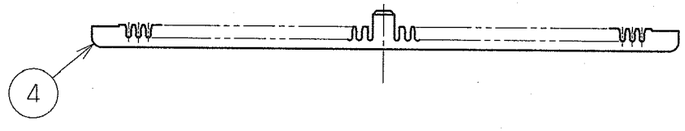

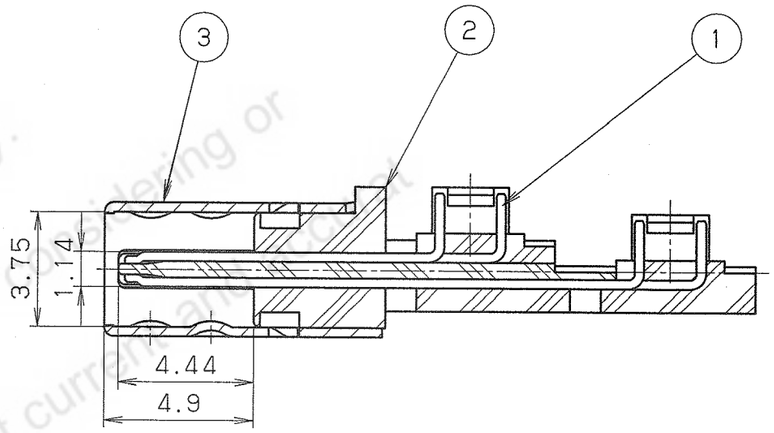

CONTACT DETAIL

(5/1)

NOTE1.CONTACT PLATING
CONTACT AREA: Pd/Ni 0.5μm+GOLD 0.1μmMIN.
TERMINAL AREA: GOLD 0.05μm
ALL OVER NICKEL UNDERPLATED

2.APPLICABLE CABLE COVER:P/N:HDRA-E100LPA( ) AND OTHERS
3.MATING CONNECTOR:P/N:HDRA-E100W( )LFDT1EC-SL+ AND OTHERS
4.APPLICABLE WIRE SIZE:AWG#30(1/0.254)
Ø0.58(CORE JACKET O.D.)

LTR.	DATE	BY	REV. DESCRIPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
				4	CABLE HOUSING	PBT (GF)	2	———	UL94V-0 BROWN
△3				3	SHELL	STEEL	1	NICKEL	———
△2				2	INSULATOR	PBT (GF)	1	———	UL94V-0 BLACK
△1	May.15.2013	M. K	Revised.	1	CONTACT	PHOSPHOR BRONZE	100	SEE NOTE 1	———

DATE	SCALE	UNIT	3RD. A. P
May.29.2004	2 / 1	mm (INCH)	
APP. DATE&REV.			

DR.	DE.	CHK.	CHK.	APP.
M.kawahara	M.kawahara	———	———	

HTK HONDA TSUSHIN KOGYO CO., LTD.

NAME	0.8mm SPACING FOR CABLE IDC MALE CONNECTOR	
PART NO.	HDRA-E100M1+	REV. 1A

ID= HDRA-E100M1+ EA

The product information in this data is for reference only. This is subject to change without notice. Contact our sales staff for further information before ordering any of our products. Please request Engineering Drawings for the most current and detailed design information.