




Price* : 116.27 GBP



Main

Range of product	Zelio Relay
Product or component type	Solid state relay
Provided accessory	Thermal interface
Device short name	SSP
Mounting support	Panel
Number of phases	3 phases
Contacts type and configuration	3 NO
Solid state output type	Random voltage switching

Complementary

Control type	Without test button
[Uc] control circuit voltage	18...36 V AC
Minimum switching voltage	18 V AC turn-on
Maximum switching voltage	2 V AC turn-off
Response time	20 ms (turn-on) 30 ms (turn-off)
Input current	15...20 mA
Output voltage	48...530 V AC
Load current	0.1...25 A
Transient overvoltage	1200 V
Surge current	275 A for 20 ms 300 A for 16.6 ms 85 A for 1 s
Maximum I ² t for fusing	380 A ² .s for 10 ms at 50 Hz half cycle 370 A ² .s for 8.3 ms at 60 Hz half cycle
Maximum leakage current	3 mA off-state
Maximum voltage drop	<1.35 V on-state
DV/Dt	500 V/μs off-state at maximum voltage

Power factor	0.5 (with maximum load)
Motor controller rating	0.75 hp 40 °C 120 V AC 1 hp 40 °C 240 V AC 3 hp 40 °C 480 V AC 4.4 hp 40 °C 530 V AC
Motor power kW	0.56 kW at 40 °C 120 V AC 0.74 kW at 40 °C 240 V AC 2.22 kW at 40 °C 480 V AC 3.24 kW at 40 °C 530 V AC
Insulation resistance	>= 1000 MOhm at 500 V DC
Maximum capacitance	8 pF for input/output
Dielectric strength	4 kV AC for input/output 4 kV AC for input or output to case
Tightening torque	0.9...1.1 N.m for input 1.7...2.2 N.m for output
Connections - terminals	Screw terminals: 1 x 0.2...1 x 2.5 mm ² , (AWG 24...AWG 14) for input Screw terminals: 1 x 1.5...1 x 10 mm ² , (AWG 16...AWG 8) for output
Thermal resistance	0.24 °C/W
LED indicator	LED, green for input
IP degree of protection	IP20
Net weight	0.24 kg
Width	101.3 mm
Height	79.7 mm
Depth	35.4 mm
Device presentation	Complete product

Environment

Flame retardance	V0 conforming to UL 94
Ambient air temperature for operation	-40...80 °C
Ambient air temperature for storage	-40...125 °C
Pollution degree	2
Overvoltage category	III
Product certifications	UL REACH RoHS CSA
Marking	CE
Standards	IEC 62314 IEC 61000 IEC 60950-1


Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	Download RoHS China Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

Contractual warranty


Warranty	18 months
----------	-----------

Dimensions

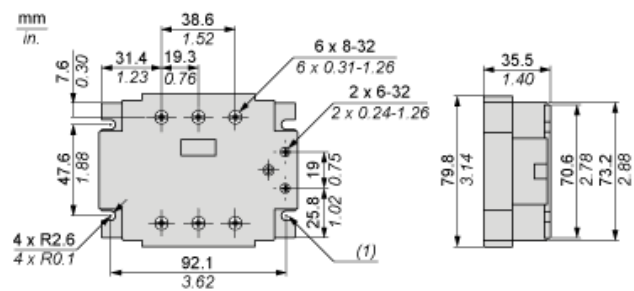

(1) 4 Mounting slots

Derating Curves

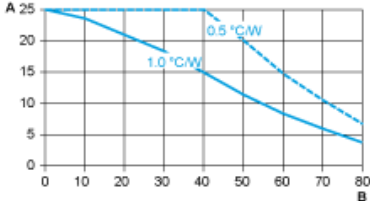

A : Load Current (Amperes)
B : Ambient Temperature (°C)